

Mechanical Connectors

Aluminum Single Barrel Connector-One Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Easy to install

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for applications upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

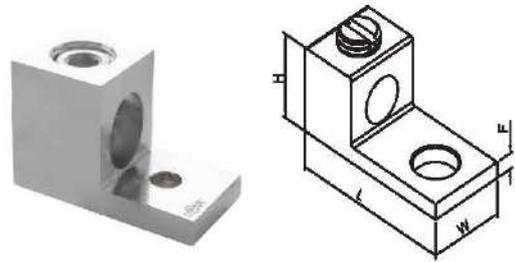

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99001	4 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99001B	6 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99001C	4 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99002	2 STR	14 AWG	1/4	1.16	0.50	0.55	0.11
99003E	1/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99003	1/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99004	2/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99004A	2/0 STR	14 AWG	1/4	2.00	0.63	0.79	0.19
99004B	3/0 STR	6 STR	1/4	1.80	0.80	0.90	0.25
99005B	3/0 STR	8 STR	5/16	2.00	0.94	1.12	0.25
99005	250 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006	300 MCM	6 STR	5/16	2.00	0.86	1.12	0.25
99006S	300 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006E	300 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99007	350 MCM	6 STR	3/8	2.25	1.26	1.25	0.25
99008	500 MCM	4 STR	3/8	2.85	1.50	1.57	0.32
99009	600 MCM	2 STR	3/8	3.19	1.50	1.57	0.44
99010	800 MCM	300 MCM	5/8	3.37	1.75	1.94	0.50
99011	1000 MCM	500 MCM	5/8	3.37	1.75	1.94	0.50

Mechanical Connectors

Aluminum Single Barrel Connectors-One Hole Mount With Anti Rotation

Features

- Single conductor design
- Tin plating for corrosion resistance
- Anti rotation feature for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

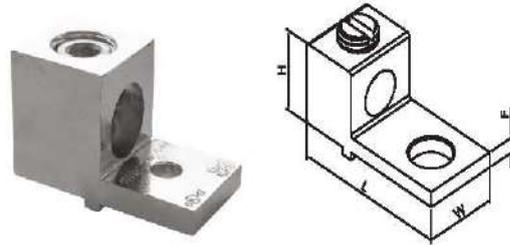

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99001-AR	4 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99001B-AR	6 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99002-AR	2 STR	14 AWG	1/4	1.16	0.50	0.55	0.11
99003-AR	1/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99004-AR	2/0 STR	14 AWG	1/4	1.46	0.63	0.95	0.19
99004B-AR	3/0 STR	6 STR	1/4	1.80	0.80	0.95	0.25
99005B-AR	3/0 STR	8 STR	5/16	2.00	0.94	1.12	0.25
99005-AR	250 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006-AR	300 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006B-AR	300 MCM	6 STR	5/16	1.94	0.94	1.12	0.25
99007-AR	350 MCM	6 STR	1/2	2.25	1.25	1.25	0.25
99008-AR	500 MCM	2 STR	1/2	2.82	1.50	1.57	0.32
99009-AR	600 MCM	2 STR	3/8	3.19	1.50	1.57	0.44
99010-AR	800 MCM	300 MCM	5/8	3.37	1.75	1.94	0.50
99011-AR	1000 MCM	500 MCM	5/8	3.37	1.75	1.94	0.50

Mechanical Connectors

Aluminum Single Barrel Connectors-Two Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

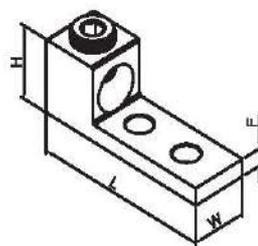

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99004A	2/0 STR	14 STR	1/4	2.00	0.63	0.79	0.19
99005A	250 MCM	6 STR	5/16	3.00	0.94	1.12	0.25
99006A	300 MCM	6 STR	5/16	3.00	0.94	1.12	0.25
99007A	350 MCM	6 STR	1/2	3.97	1.25	1.25	0.31
99008A	500 MCM	4 STR	1/2	4.22	1.50	1.57	0.32
99009A	600 MCM	2 STR	1/2	4.22	1.50	1.57	0.44
99010A	800 MCM	300 AWG	1/2	4.62	1.75	1.94	0.50
99011A	1000 MCM	500 AWG	1/2	4.62	1.75	1.94	0.50

Aluminum Single Barrel Connectors-Two Hole (Switchgear) Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Switchgear hole for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

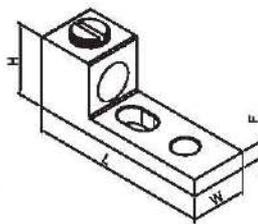

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99005A-SM	250 MCM	6 STR	5/16	3.00	0.94	1.12	0.25
99007A-SM	350 MCM	6 STR	1/2	3.97	1.25	1.25	0.31
99008A-SM	500 MCM	4 STR	1/2	4.22	1.50	1.57	0.32

Mechanical Connectors

Aluminum Single Barrel Two Row Connectors-Two Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

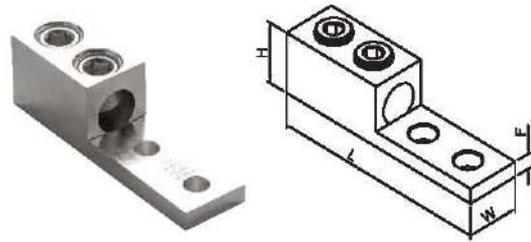

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99007-DS	350 MCM	6 STR	1/2	5.25	1.25	1.25	0.25
99008A-DS	500 MCM	2 STR	1/2	5.75	1.50	1.57	0.32
99009-DS	600 MCM	2 STR	1/2	5.75	1.50	1.57	0.44
99010-DS	800 MCM	300 MCM	1/2	5.75	1.75	1.97	0.50
99011-DS-14	1000 MCM	500 MCM	1/2	5.75	1.75	1.97	0.50

Aluminum Single Barrel Two Row Connectors-Two Hole (Switchgear) Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Switchgear hole for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

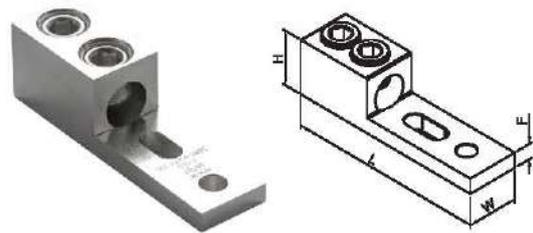

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99009-SMDS	600 MCM	2 STR	1/2	5.75	1.50	1.57	0.44
99010-SMDS	800 MCM	300 MCM	1/2	5.75	5.75	1.94	0.50
99011-SMDS	1000 MCM	500 MCM	1/2	5.75	5.75	1.94	0.50

Mechanical Connectors

Aluminum Single Barrel Connectors I-Beam Style One Hole Mount

Features

- Single conductor design I-Beam style
- Tin plating for corrosion resistance

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

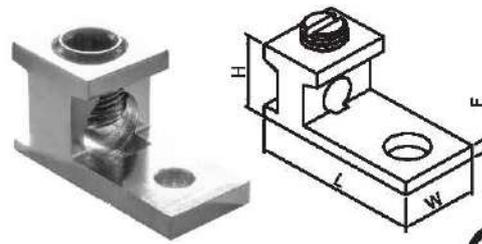

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99901	6 STR	14 AWG	1/4	1.06	0.50	0.49	0.09
99902	4 STR	14 AWG	1/4	1.06	0.50	0.49	0.09
99903	2 STR	14 AWG	1/4	1.16	0.50	0.55	0.10
99904	1/0 STR	14 AWG	1/4	1.31	0.62	0.78	0.16
99905	2/0 STR	14 AWG	1/4	1.47	0.63	0.78	0.19
99905A	4/0 STR	6 STR	5/16	2.00	0.88	1.09	0.22
99906	250 MCM	6 STR	5/16	2.00	0.88	1.09	0.22
99907	300 MCM	6 STR	3/8	2.00	1.00	1.13	0.25
99908	350 MCM	4 STR	5/16	2.25	1.00	1.19	0.25
99909	500 MCM	4 STR	3/8	2.80	1.25	1.44	0.31
99910	600 MCM	2 STR	3/8	2.80	1.43	1.56	0.31
99911	750 MCM	1/0 STR	5/8	3.19	1.43	1.56	0.44
99912	1000 MCM	300 MCM	1/2	3.50	1.62	1.94	0.44

Aluminum Single Barrel Connectors I-Beam Style Two Hole Mount

Features

- Single conductor design I-Beam style
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

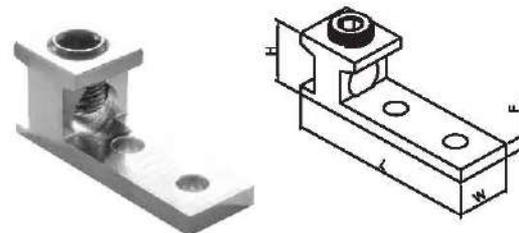

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99908A	350 MCM	4 STR	3/8	4.25	1.00	1.19	0.25
99909A	500 MCM	4 STR	3/8	4.59	1.25	1.44	0.31
99910A	600 MCM	4 STR	1/2	4.59	1.25	1.56	0.38
99911A	750 MCM	1/0 STR	5/8	4.62	1.43	1.56	0.44
99912A	1000 KCMIL	300 MCM	1/2	4.62	1.63	1.94	0.44

Mechanical Connectors

Aluminum Single Barrel Two Row Connectors I-Beam Style Two Hole Mount

Features

- Single conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximun secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

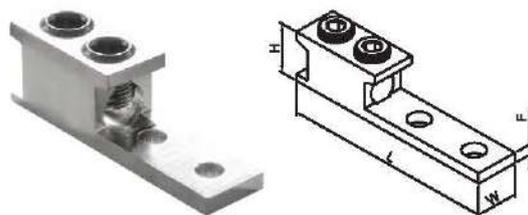

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99908DS	350 MCM	4 STR	1/2	5.25	1.00	1.19	0.25
99909DS	500 MCM	4 STR	3/8	5.75	1.50	1.56	0.38
99910DS	600 MCM	4 STR	1/2	5.75	1.50	1.56	0.38
99911DS	750 MCM	1/0 STR	5/8	6.20	1.43	1.56	0.44
99912DS	1000 KCMIL	300 MCM	1/2	6.20	1.63	1.94	0.44

Aluminum Single Barrel Two Row Connectors I-Beam Style Two Hole (Switchgear) Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Two screw desing maximun secureness
- Switchgear hole for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

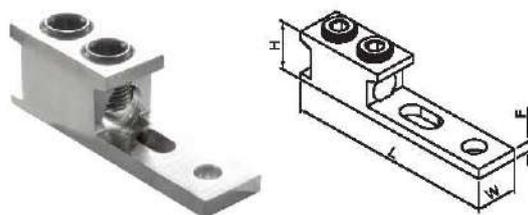

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99908-SMD2S	350 MCM	4 STR	1/2	5.25	1.00	1.19	0.25
99909-SMD2S	500 MCM	4 STR	3/8	5.75	1.50	1.56	0.31
99910-SMD2S	600 MCM	4 STR	1/2	5.75	1.50	1.56	0.38
99911-SMD2S	750 MCM	1/0 STR	5/8	6.20	1.43	1.56	0.44
99912-SMD2S	1000 KCMIL	300 MCM	1/2	6.20	1.63	1.94	0.44

Mechanical Connectors

Aluminum Two Barrel Connectors One Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Easy to installation

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

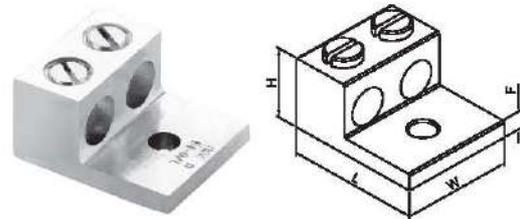

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99012	1/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99013	2/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99014	250 KCMIL	6 STR	3/8	2.56	1.66	1.19	0.25
99015	350 MCM	6 STR	1/2	2.87	1.91	1.22	0.25
99016	600 MCM	2 STR	1/2	3.20	2.40	1.57	0.44
99017	750 MCM	300 KCMIL	5/8	3.35	3.19	1.94	0.50
99018	1000 KCMIL	500 KCMIL	5/8	3.37	3.19	1.94	0.50

Aluminum Two Barrel Connectors - Two Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

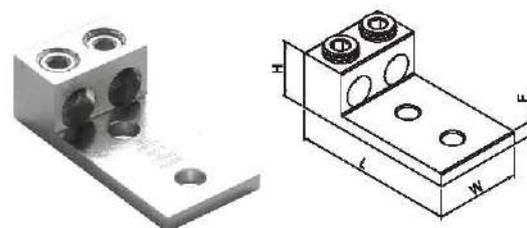

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99013A	2/0 STR	14 AWG	1/4	2.30	1.22	0.79	0.19
99014A	250 KCMIL	6 STR	3/8	4.12	1.66	1.19	0.25
99018A	1000 KCMIL	500 KCMIL	1/2	4.62	3.19	1.94	0.50
99027	350 MCM	6 STR	1/2	4.13	1.91	1.22	0.31
99028	600 MCM	4 STR	1/2	4.22	2.40	1.57	0.44
99029	750 MCM	350 KCMIL	1/2	4.62	3.19	1.94	0.50

Mechanical Connectors

Aluminum Two Barrel Two Row Connectors - Two Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Two screw desing maximun secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

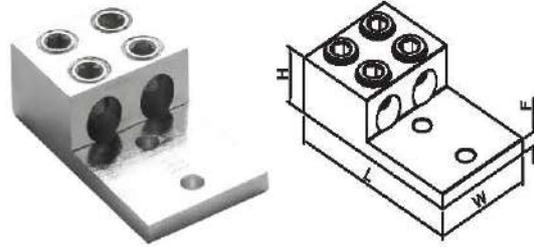

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99027-DS	350 MCM	6 STR	1/2	5.15	1.91	1.22	0.31
99028A	500 MCM	4 STR	1/2	5.88	2.40	1.62	0.44
99029-DS	750 MCM	300 KCMIL	1/2	5.62	3.19	1.94	0.50
99029A	1000 KCMIL	350 KCMIL	1/2	5.75	3.56	1.94	0.50

Aluminum Two Barrel Two Row Connectors - Four Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Two screw desing maximun secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

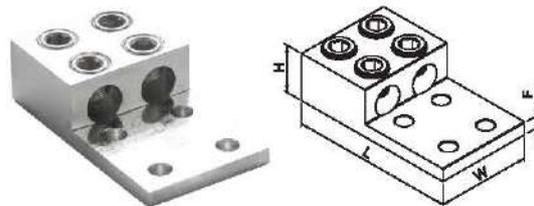

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99027-DS-4	2 STR	14 AWG	1/4	2.30	1.22	0.79	0.19
99029-DS-4	250 KCMIL	6 STR	3/8	4.12	1.66	1.19	0.25
99029A-4	1000 KCMIL	500 KCMIL	1/2	4.62	3.19	1.94	0.50

Mechanical Connectors

Aluminum Two Barrel Connectors - Two Row Connectors Six Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

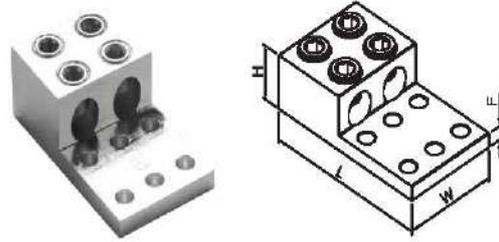

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99027-DS-6	2 STR	14 AWG	1/4	2.30	1.22	0.79	0.19
99029-DS-6	250 STR	6 STR	3/8	4.12	1.66	1.19	0.25
99029A-6	1000 KCMIL	500KCMIL	1/2	4.62	3.19	1.94	0.50

Aluminum Two Barrel Connectors - One Hole Mount With Anti Rotation

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Anti rotation feature for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

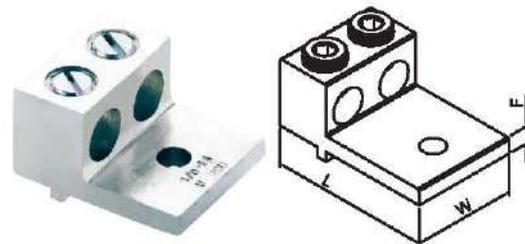

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99012-AR	1/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99013-AR	2/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99014-AR	250 KCMIL	6 STR	3/8	2.56	1.66	1.19	0.25
99015-AR	350 MCM	6 STR	1/2	2.87	1.91	1.22	0.25
99016-AR	600 MCM	2 STR	1/2	3.20	2.40	1.57	0.44
99017-AR	800 MCM	300 KCMIL	5/8	3.35	3.19	2.00	0.50
99018-AR	1000 KCMIL	500 KCMIL	5/8	3.37	3.19	2.00	0.50

Mechanical Connectors

Aluminum Two Barrel Connectors - One Hole Mount Narrow Tongue

Features

- Dual conductor narrow tongue design
- Tin plating for corrosion resistance
- Easy to install

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

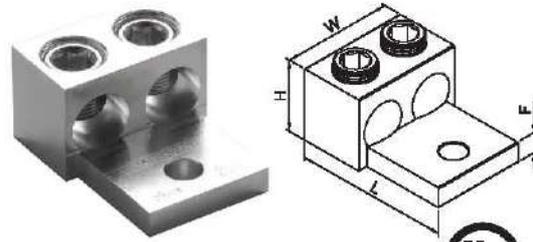

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99012-NT	1/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99013-NT	2/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99014-NT	250 KCMIL	6 STR	3/8	2.56	1.66	1.29	0.25
99015-NT	350 MCM	6 STR	1/2	2.87	1.91	1.22	0.25
99015B-NT	500 MCM	4 STR	1/2	3.20	2.40	1.57	0.25
99016-NT	600 MCM	2 STR	1/2	3.20	2.40	1.57	0.44
99017-NT	800 MCM	300 KCMIL	5/8	3.37	3.19	1.94	0.50
99018-NT	1000 KCMIL	350 KCMIL	5/8	3.37	3.19	1.94	0.50
99027-NT	350 MCM	6 STR	1/2	4.13	1.91	1.22	0.31
99028-NT	600 MCM	4 STR	1/2	4.22	2.40	1.57	0.44
99029-NT	800 MCM	300 KCMIL	1/2	4.62	3.19	1.94	0.50
99029A-NT	1000 KCMIL	350 KCMIL	1/2	5.75	3.56	1.94	0.50

Aluminum Two Barrel Connectors I-Beam Style One Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Easy to install

Electrical Rating


- Voltage : 600 V
- Temp : 90°C

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish We Supply

- Aluminum • Tin plated • Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

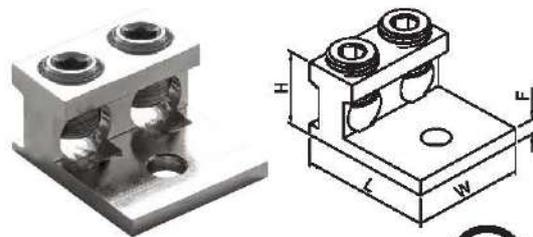

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921	1/0 STR	14 AWG	1/4	1.31	1.13	0.78	0.16
99922	2/0 STR	14 AWG	1/4	1.47	1.25	0.78	0.19
99923	250 MCM	6 STR	3/8	2.56	1.62	1.09	0.22
99924	350 MCM	6 STR	3/8	2.88	1.92	1.19	0.25
99925	500 MCM	4 STR	1/2	2.63	2.41	1.44	0.31
99926	600 MCM	2 STR	1/2	2.80	2.41	1.56	0.38
99927	750 MCM	1/2 STR	1/2	3.26	3.50	1.81	0.44
99928	1000 KCMIL	500 MCM	1/2	3.50	3.50	1.94	0.44

Mechanical Connectors

Aluminum Two Barrel Connectors I-Beam Style One Hole Mount With Anti Rotation

Features

- Dual conductor design I-Beam style
- Tin plating for corrosion resistance
- Anti rotation feature for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

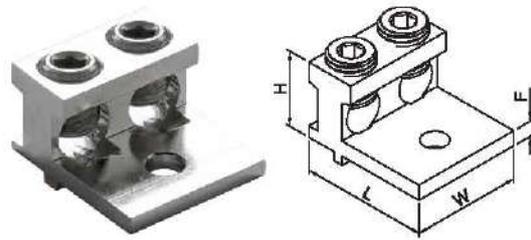

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921-AR	1/0 STR	14 AWG	1/4	1.31	1.13	0.78	0.16
99922-AR	2/0 STR	14 AWG	1/4	1.47	1.25	0.78	0.19
99923-AR	250 MCM	6 STR	3/8	2.56	1.62	1.09	0.22
99924-AR	350 MCM	6 STR	3/8	2.88	1.92	1.19	0.25
99925-AR	500 MCM	4 STR	1/2	2.63	2.41	1.44	0.31
99926-AR	600 MCM	2 STR	1/2	2.80	2.41	1.56	0.38
99927-AR	750 MCM	1/0 STR	1/2	3.25	3.50	1.81	0.44
99928-AR	1000 KCMIL	500 MCM	1/2	3.50	3.50	1.94	0.44

Aluminum Two Barrel Connectors I-Beam Style Two Hole Mount

Features

- Dual conductor design I-Beam style
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Electrical Rating


- Voltage : 600 V
- Temp : 90°C

Material Finish

- Aluminum • Tin plated

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

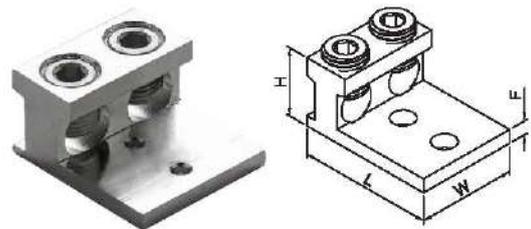

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921A	1/0 STR	14 STR	1/4	2.20	1.13	0.78	0.16
99922A	2/0 STR	14 STR	1/4	2.20	1.25	0.78	0.19
99923A	250 MCM	6 STR	3/8	3.50	1.62	1.09	0.22
99924A	350 MCM	6 STR	3/8	4.25	1.92	1.19	0.25
99925A	500 MCM	4 STR	1/2	4.59	2.41	1.44	0.31
99926A	600 MCM	2 STR	1/2	4.59	2.41	1.56	0.38
99927A	750 MCM	1/0 STR	1/2	4.62	3.50	1.81	0.44
99928A	1000 KCMIL	500 MCM	1/2	4.62	3.50	1.94	0.44

Mechanical Connectors

Aluminum Two Barrel Connectors I-Beam Style Four Hole Mount

Features

- Dual conductor design I-Beam style
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

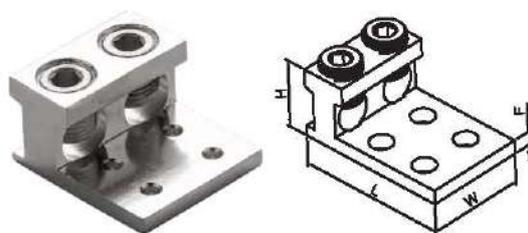

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921-4	1/0 STR	14 AWG	1/4	2.20	1.13	0.78	0.16
99922-4	2/0 STR	14 AWG	1/4	2.20	1.25	0.78	0.19
99923-4	250 MCM	6 STR	3/8	3.50	1.62	1.09	0.22
99924-4	350 MCM	6 STR	3/8	4.25	1.92	1.09	0.25
99925-4	500 MCM	4 STR	1/2	4.59	2.41	1.44	0.31
99926-4	600 MCM	2 STR	1/2	4.59	2.41	1.56	0.38
99927-4	750 MCM	1/0 STR	1/2	4.62	3.50	1.81	0.44
99928-4	1000 KCMIL	500 MCM	1/2	4.62	3.50	1.94	0.44

Aluminum Two Barrel Two Row Connectors I-Beam Style Two Hole Mount

Features

- Dual conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

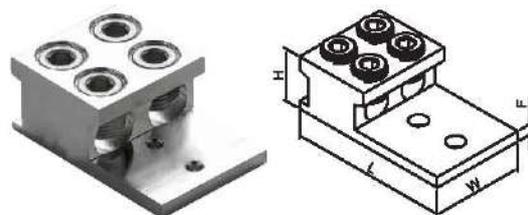

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921DS	1/0 STR	14 AWG	1/4	2.75	1.13	0.78	0.16
99922DS	2/0 STR	14 AWG	1/4	2.75	1.25	0.78	0.19
99923DS	250 MCM	6 STR	3/8	4.50	1.62	1.09	0.22
99924DS	350 MCM	6 STR	3/8	5.00	1.92	1.19	0.25
99925DS	500 MCM	4 STR	1/2	4.59	2.41	1.44	0.31
99926DS	600 MCM	2 STR	1/2	4.59	2.41	1.56	0.38
99927DS	750 MCM	1/0 STR	1/2	4.84	3.50	1.81	0.44
99928DS	1000 KCMIL	500 MCM	1/2	4.94	3.50	1.94	0.44

Mechanical Connectors

Aluminum Two Barrel Two Row Connectors I-Beam Style Four Hole Mount

Features

- Dual conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix: 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix: 2-4 mounting holes

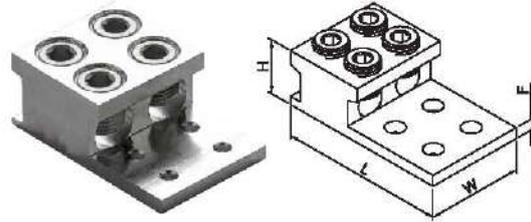

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99921DS-4	1/0 STR	14 AWG	1/4	2.75	1.13	0.78	0.16
99922DS-4	2/0 STR	14 AWG	1/4	2.75	1.25	0.78	0.19
99923DS-4	250 MCM	6 STR	3/8	4.50	1.62	1.09	0.22
99924DS-4	350 MCM	6 STR	3/8	5.00	1.92	1.19	0.25
99925DS-4	500 MCM	4 STR	1/2	4.59	2.41	1.44	0.31
99926DS-4	600 MCM	2 STR	1/2	4.59	2.41	1.56	0.38
99927DS-4	750 MCM	1/0 STR	1/2	4.84	3.50	1.81	0.44
99928DS-4	1000 KCMIL	500 MCM	1/2	4.94	3.50	1.94	0.44

Aluminum Three Barrel Connectors - Two Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix: 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix: 2-4 mounting holes

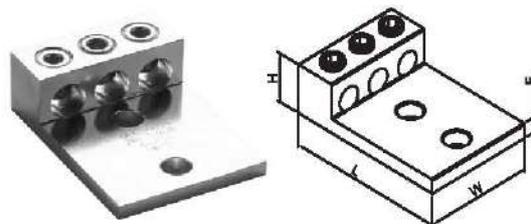

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99020	1/0 STR	14 STR	3/8	2.90	2.00	0.79	0.25
99020A	2/0 STR	14 STR	1/2	3.86	2.13	0.87	0.25
99021	3/0 STR	6 STR	1/2	3.86	2.13	1.11	0.25
99022	250 KCMIL	6 STR	1/2	4.13	2.75	1.19	0.31
99023	350 MCM	6 STR	1/2	4.13	3.00	1.25	0.31
99024A	500 MCM	2 STR	1/2	4.58	3.76	1.62	0.44

Mechanical Connectors

Aluminum Three Barrel Connectors - Four Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

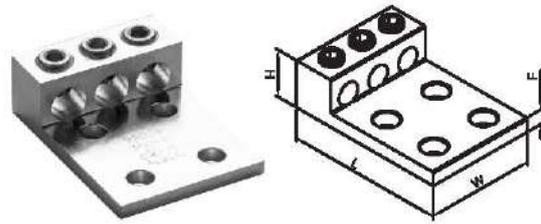

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99031	1/0 STR	14 AWG	3/8	2.90	2.00	0.87	0.25
99020A-4	2/0 STR	14 AWG	1/2	3.86	2.13	0.87	0.25
99021-4	3/0 STR	6 STR	1/2	3.86	2.13	1.11	0.25
99032	3/0 STR	6 STR	1/2	3.86	2.13	1.11	0.31
99033	250 MCM	6 STR	1/2	4.13	2.83	1.19	0.31
99034	350 MCM	6 STR	1/2	4.13	3.00	1.25	0.31
99024A-4	500 MCM	2 STR	1/2	4.58	3.76	1.62	0.44

Aluminum Three Barrel Connectors - Six Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Six mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-6 mounting holes

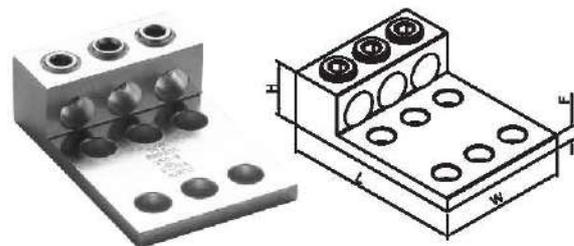

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99022-6	250 KCMIL	6 STR	3/8	4.13	2.75	1.25	0.31
99023-6	350 KCMIL	6 STR	1/2	4.13	3.00	1.25	0.31
99024A-6	500 KCMIL	2 STR	1/2	4.58	3.76	1.62	0.44

Mechanical Connectors

Aluminum Three Barrel Two Row Connectors - Two Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

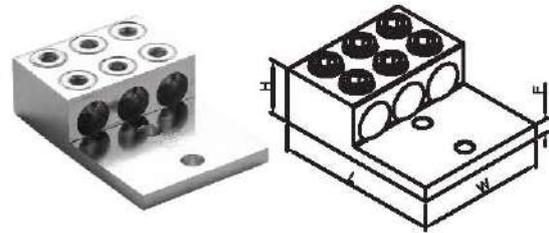

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99024	600 MCM	2 STR	1/2	2.75	3.76	1.62	0.44
99025	800 MCM	300 KCMIL	1/2	2.75	3.84	1.62	0.50
99026	1000 KCMIL	500 KCMIL	1/2	4.50	4.57	1.94	0.50

Aluminum Three Barrel Two Row Connectors - Four Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

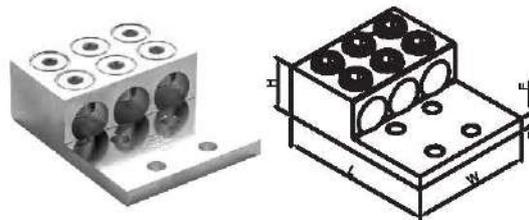

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99035	600 MCM	2 STR	1/2	5.58	3.76	1.62	0.44
99036	800 MCM	350 KCMIL	1/2	5.75	4.57	1.94	0.50
99037	1000 KCMIL	500 KCMIL	1/2	5.75	4.57	1.94	0.50

Mechanical Connectors

Aluminum Three Barrel Two Row Connectors Six Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Two screw design maximum secureness
- Six mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-6 mounting holes

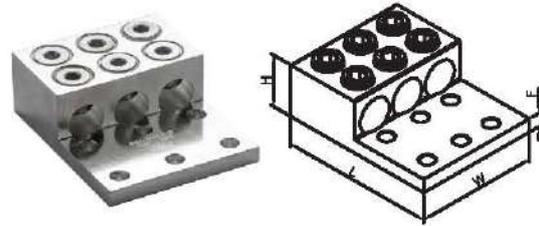

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99035B	600 MCM	2 STR	1/2	5.58	3.76	1.62	0.44
99036B	800 MCM	350 KCMIL	1/2	5.75	4.57	1.94	0.50
99037B	1000 KCMIL	500 KCMIL	1/2	5.75	4.57	1.94	0.50

Aluminum Three Barrel Connectors I-Beam Style One Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Easy to installation

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

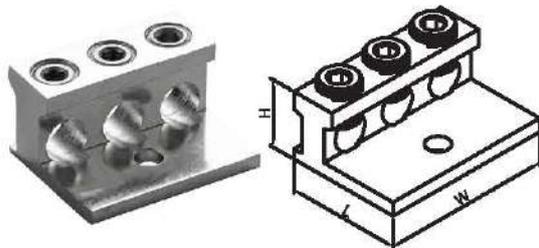

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931	1/0 STR	14 AWG	3/8	1.31	1.94	0.78	0.19
99932	2/0 STR	14AWG	3/8	1.47	1.94	0.78	0.19
99933	250 MCM	6 STR	1/2	2.56	2.46	1.19	0.25
99934	350 MCM	6 STR	1/2	2.88	2.92	1.19	0.25
99935	500 MCM	4 STR	1/2	2.63	3.67	1.56	0.38
99936	600 MCM	2 STR	1/2	2.00	5.03	1.56	0.38
99937	750 MCM	1/0 MCM	1/2	3.25	6.53	1.94	0.44
99938	1000 KCMIL	500 MCM	1/2	3.50	6.53	1.94	0.44

Mechanical Connectors

Aluminum Three Barrel Connectors I-Beam Style Two Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

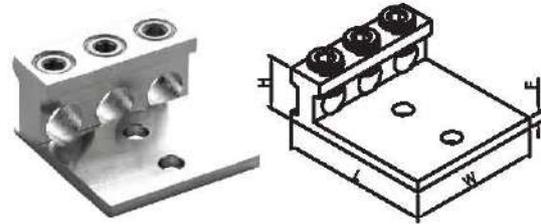

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931-2	1/0 STR	14 AWG	3/8	2.20	1.94	0.78	0.19
99932-2	2/0 STR	14 AWG	3/8	2.20	1.94	0.78	0.19
99933-2	250 MCM	6 STR	1/2	3.50	2.46	1.19	0.25
99934-2	350 MCM	6 STR	1/2	4.25	2.92	1.19	0.25
99935-2	500 MCM	4 STR	1/2	4.59	3.67	1.56	0.38
99936-2	600 MCM	2 STR	1/2	4.59	5.63	1.56	0.38
99937-2	750 MCM	1/0 MCM	1/2	4.62	6.53	1.94	0.44
99938-2	1000 KCMIL	500 MCM	1/2	4.62	6.53	1.94	0.44

Aluminum Three Barrel Connectors I-Beam Style Four Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

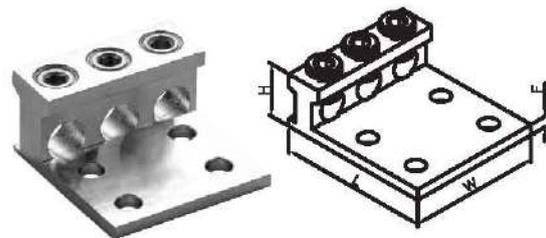

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931-4	1/0 STR	14 AWG	3/8	2.20	1.94	0.78	0.19
99932-4	2/0 STR	14 AWG	3/8	2.20	1.94	0.78	0.19
99933-4	250 MCM	6 STR	1/2	3.30	2.46	1.19	0.25
99934-4	350 MCM	6 STR	1/2	4.25	2.92	1.19	0.25
99935-4	500 MCM	4 STR	1/2	4.59	3.67	1.56	0.38
99936-4	600 MCM	2 STR	1/2	4.59	5.63	1.56	0.38
99937-4	750 MCM	1/0 MCM	1/2	4.62	6.53	1.94	0.44
99938-4	1000 KCMIL	500 MCM	1/2	4.62	6.53	1.94	0.44

Mechanical Connectors

Aluminum Three Barrel Two Row Connectors I-Beam Style Two Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

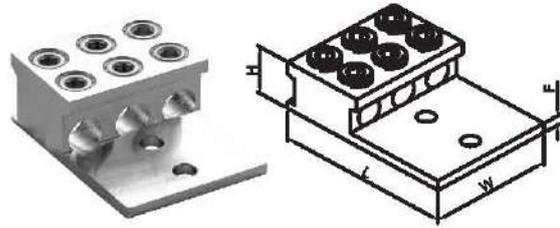

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931DS	1/0 STR	14 AWG	3/8	2.75	1.94	0.78	0.19
99932DS	2/0 STR	14 AWG	3/8	2.75	1.94	0.78	0.19
99933DS	250 MCM	6 STR	1/2	4.50	2.46	1.19	0.25
99934DS	350 MCM	6 STR	1/2	5.00	2.92	1.19	0.25
99935DS	500 MCM	4 STR	1/2	4.59	3.67	1.56	0.38
99936DS	600 MCM	2 STR	1/2	4.59	5.63	1.56	0.38
99937DS	750 MCM	1/0 MCM	1/2	4.84	6.53	1.94	0.44
99938DS	1000 KCMIL	500 MCM	1/2	4.94	6.53	1.94	0.44

Aluminum Three Barrel Two Row Connectors I-Beam Style Four Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Four mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

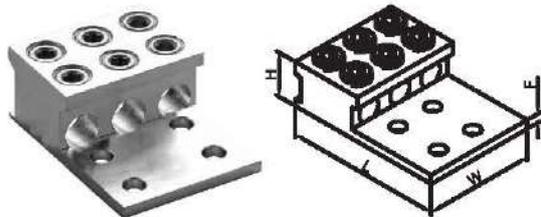

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931DS-4	1/0 STR	14 AWG	3/8	1.31	1.94	0.78	0.19
99932DS-4	2/0 STR	14 AWG	3/8	1.47	1.94	0.78	0.19
99933DS-4	250 MCM	6 STR	1/2	2.56	2.46	1.19	0.25
99934DS-4	350 MCM	6 STR	1/2	2.88	2.92	1.19	0.25
99935DS-4	500 MCM	4 STR	1/2	2.63	3.67	1.56	0.38
99936DS-4	600 MCM	2 STR	1/2	2.00	5.03	1.56	0.38
99937DS-4	750 MCM	1/0 MCM	1/2	3.25	6.53	1.94	0.44
99938DS-4	1000 KCMIL	500 MCM	1/2	3.50	6.53	1.94	0.44

Mechanical Connectors

Aluminum Three Barrel Two Row Connectors I-Beam Style Six Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Six mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-6 mounting holes

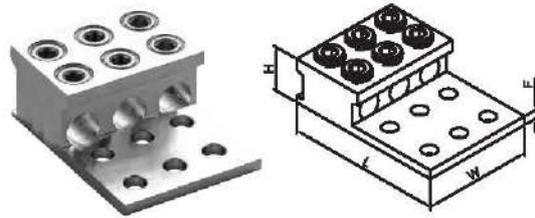

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99931DS-6	1/0 STR	14 AWG	3/8	2.75	1.94	0.78	0.19
99932DS-6	2/0 STR	14 AWG	3/8	2.75	1.94	0.78	0.19
99933DS-6	250 MCM	6 STR	1/2	4.50	2.46	1.19	0.25
99934DS-6	350 MCM	6 STR	1/2	5.00	2.92	1.19	0.25
99935DS-6	500 MCM	4 STR	1/2	4.59	3.67	1.56	0.38
99936DS-6	600 MCM	2 STR	1/2	4.59	5.63	1.56	0.38
99937DS-6	750 MCM	1/0 MCM	1/2	4.84	6.53	1.94	0.44
99938DS-6	1000 KCMIL	500 MCM	1/2	4.94	6.53	1.94	0.44

Aluminum Four Barrel Connectors- Four Hole Mount

Features

- Four conductor design
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

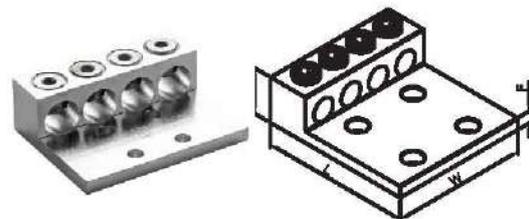

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99038	250 MCM	6 STR	1/2	4.13	3.74	1.25	0.31
99039	350 MCM	6 STR	1/2	4.13	3.94	1.25	0.31
99041	1000 MCM	300 MCM	1/2	6.00	5.75	1.25	0.50

Mechanical Connectors

Aluminum Four Barrel Two Row Connectors-Four Hole Mount

Features


- Four conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material **Finish**
 • Aluminum • Tin plated

Electrical Rating **We Supply**
 • Voltage : 600 V • Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
 • Temp : 90°C • Part number with suffix : 2-4 mounting holes

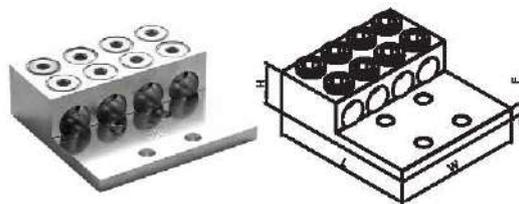

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99040	600 MCM	2 STR	1/2	5.58	2.00	1.62	0.44
99041A	1000 KCMIL	350 KCMIL	1/2	5.75	5.97	1.94	0.44

Aluminum Four Barrel Two Row Connectors-Eight Hole Mount

Features


- Four conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Eight mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material **Finish**
 • Aluminum • Tin plated

Electrical Rating **We Supply**
 • Voltage : 600 V • Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
 • Temp : 90°C • Part number with suffix : 2-8 mounting holes

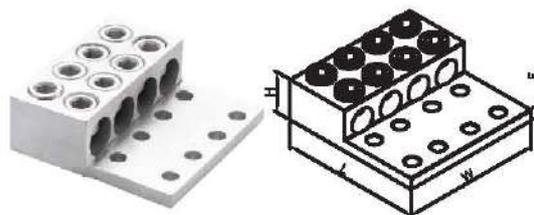

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99042	600 MCM	2 STR	1/2	5.58	5.51	1.62	0.44

Mechanical Connectors

Aluminum Four Barrel Two Row Connectors-Ten Hole Mount

Features

- Four conductor design
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Ten mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-10 mounting holes

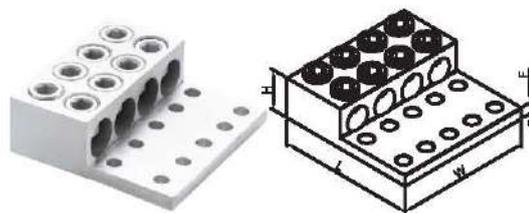

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99043	1000 KCMIL	350 KCMIL	1/2	5.75	5.50	1.94	0.44

Aluminum Four Barrel Connectors I-Beam Style Two Hole Mount

Features

- Four conductor design I-Beam style
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

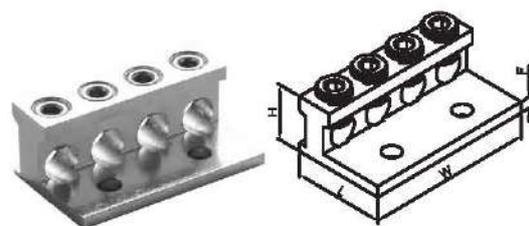

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99941	1/0 STR	14 AWG	3/8	1.31	2.40	0.78	0.19
99942	2/0 STR	14 AWG	3/8	1.47	2.40	0.78	0.19
99943	250 MCM	6 STR	1/2	2.56	4.00	1.19	0.25
99944	350 MCM	6 STR	1/2	2.88	4.00	1.19	0.25
99945	500 MCM	4 STR	1/2	2.63	5.00	1.56	0.38
99946	600 MCM	2 STR	1/2	2.80	5.63	1.56	0.38
99947	750 MCM	1/0 MCM	1/2	3.25	6.53	1.94	0.44
99948	1000 KCMIL	500 MCM	1/2	3.50	6.53	1.94	0.44

Mechanical Connectors

Aluminum Four Barrel Connectors I-Beam Style Four Hole Mount

Features

- Four conductor design I-Beam style
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

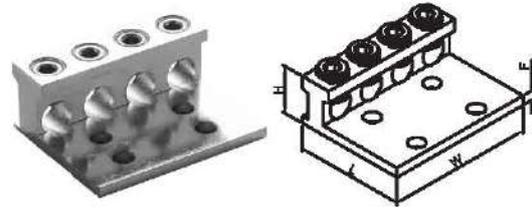

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99941-4	1/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99942-4	2/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99943-4	250 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99944-4	350 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99945-4	500 MCM	4 STR	1/2	4.59	5.00	1.56	0.38
99946-4	600 MCM	2 STR	1/2	5.25	5.63	1.56	0.38
99947-4	750 MCM	1/0 MCM	1/2	5.75	6.53	1.94	0.44
99948-4	1000 KCMIL	500 MCM	1/2	5.75	6.53	1.94	0.44

Aluminum Four Barrel Two Row Connectors I-Beam Style Four Hole Mount

Features

- Four conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Four mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

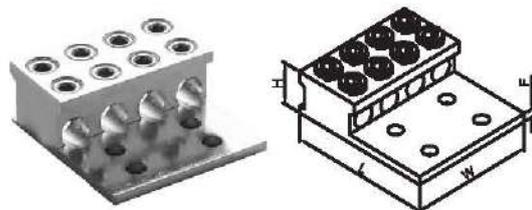

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99941DS	1/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99942DS	2/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99943DS	250 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99944DS	350 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99945DS	500 MCM	4 STR	1/2	4.59	5.00	1.56	0.38
99946DS	600 MCM	2 STR	1/2	5.62	5.63	1.56	0.38
99947DS	750 MCM	1/0 MCM	1/2	6.19	6.53	1.94	0.44
99948DS	1000 KCMIL	500 MCM	1/2	6.19	6.53	1.94	0.44

Mechanical Connectors

Aluminum Four Barrel Two Row Connectors I-Beam Style Eight Hole Mount

Features

- Four conductor design I-Beam style
- Tin plating for corrosion resistance
- Two screw desing maximum secureness
- Eight mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-8 mounting holes

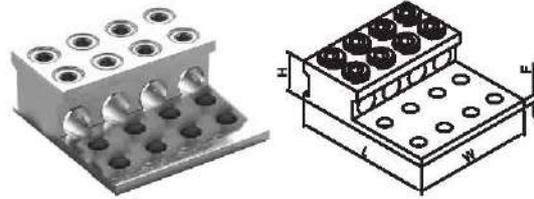

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99941DS-8	1/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99942DS-8	2/0 STR	14 AWG	3/8	2.20	2.40	0.78	0.19
99943DS-8	250 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99944DS-8	350 MCM	6 STR	1/2	4.25	4.00	1.19	0.25
99945DS-8	500 MCM	4 STR	1/2	4.59	5.00	1.56	0.38
99946DS-8	600 MCM	2 STR	1/2	5.62	5.63	1.56	0.38
99947DS-8	750 MCM	1/0 MCM	1/2	6.19	6.53	1.94	0.44
99948DS-8	1000 KCMIL	500 MCM	1/2	6.19	6.53	1.94	0.44

Aluminum Two Barrel Panel Board Connectors One Hole Mount

Features

- Two conductor design
- Applicable for circuit breaker
- Tin plating for corrosion resistance

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

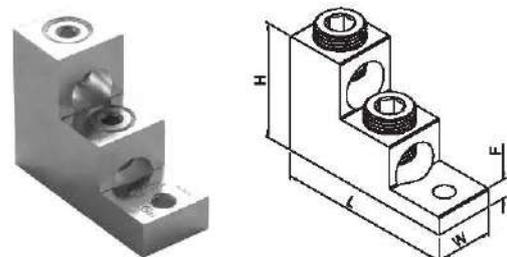

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99049	1/0 STR	14 AWG	1/4	2.08	0.63	1.53	0.31
99050	2/0 STR	14 AWG	1/4	2.08	0.63	1.53	0.31
99051	350 MCM	6 STR	5/16	2.99	1.00	2.01	0.31
99051A	350 MCM	6 STR	3/8	2.99	1.00	2.01	0.31
99051B	300 MCM	6 STR	3/8	3.60	1.97	2.01	0.31
99054A	350 MCM	6 STR	3/8	3.60	1.97	2.01	0.31
99055	600 MCM	2 STR	3/8	3.86	1.50	2.99	0.76
99055A	600 MCM	2 STR	1/2	3.86	1.50	2.99	0.76
99059	750 MCM	1/0 STR	3/8	3.86	1.57	2.99	0.76

Mechanical Connectors

Aluminum Two Barrel Panel Board Connectors One Hole Mount With Anti Rotation

Features

- Two conductor design
- Applicable for circuit breaker
- Tin plating for corrosion resistance
- Anti rotation feature for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

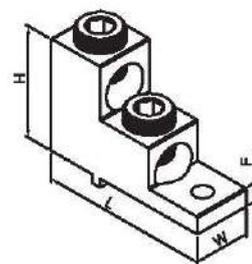

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99049-AR	1/0 STR	14 AWG	1/4	2.08	0.63	1.53	0.31
99050-AR	2/0 STR	14 AWG	1/4	2.08	0.63	1.53	0.31
99051-AR	350 MCM	6 STR	5/16	2.99	1.00	2.01	0.31
99051B-AR	300 MCM	6 STR	3/8	2.99	1.00	2.01	0.31
99054A-AR	600 MCM	6 STR	3/8	3.60	1.00	2.00	0.31
99055-AR	600 MCM	2 STR	3/8	3.86	1.50	3.00	0.76
99055A-AR	600 MCM	2 STR	1/2	3.86	1.50	3.00	0.76
99059-AR	750 MCM	1/0 STR	3/8	3.86	1.57	3.00	0.76

Aluminum Two Barrel Panel Board Connectors Two Hole Mount

Features

- Two conductor design
- Applicable for circuit breaker
- Tin plating for corrosion resistance

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

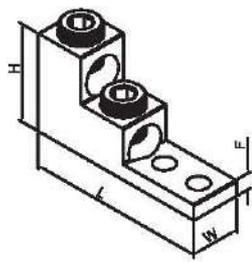

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99051B	350 MCM	6 STR	3/8	2.99	1.00	2.01	0.31
99052	350 MCM	6 STR	5/16	3.85	1.00	2.01	0.31
99052A	350 MCM	6 STR	3/8	3.85	1.00	2.01	0.31
99056	600 MCM	2 STR	3/8	4.92	1.50	2.99	0.76
99056A	600 MCM	2 STR	1/2	5.51	1.50	2.99	0.76
99060	750 MCM	1/0 STR	3/8	4.92	1.57	2.99	0.76
99060A	750 MCM	1/0 STR	1/2	4.92	1.57	2.99	0.76
99060B	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76

Mechanical Connectors

Aluminum Two Barrel Panel Connectors I-Beam Style One Hole Mount

Features

- Two conductor design I-Beam style
- Applicable for circuit breaker
- Tin plating for corrosion resistance

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish


- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

We Supply

- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

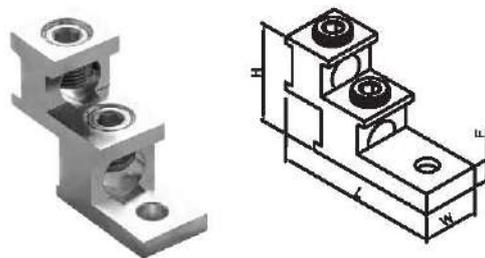

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99952	1/0 STR	14 AWG	3/8	2.10	0.63	1.49	0.19
99953	2/0 STR	14 AWG	3/8	2.10	0.63	1.49	0.19
99954	250 MCM	6 STR	3/8	2.80	0.90	1.05	0.25
99955	350 MCM	6 STR	3/8	2.80	1.00	2.16	0.25
99956	500 MCM	4 STR	3/8	3.90	1.40	3.00	0.38
99957	600 MCM	2 STR	3/8	3.90	1.40	3.00	0.38
99958	750 MCM	1/0 STR	3/8	3.90	1.57	3.78	0.44

Aluminum Two Barrel Panel Board Connectors I-Beam Style Two Hole Mount

Features

- Two conductor design I-Beam style
- Applicable for circuit breaker
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

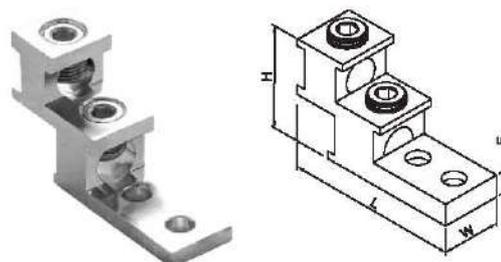

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99952A	1/0 STR	14 AWG	3/8	3.00	0.63	1.49	0.19
99953A	2/0 STR	14 AWG	3/8	3.00	0.63	1.49	0.19
99954A	250 MCM	6 STR	3/8	3.60	0.90	1.05	0.25
99955A	350 MCM	6 STR	3/8	3.81	1.00	2.16	0.25
99956A	500 MCM	4 STR	3/8	5.50	1.40	3.00	0.38
99957A	600 MCM	2 STR	3/8	5.50	1.40	3.00	0.38
99958A	750 MCM	1/0 STR	3/8	6.00	1.57	3.00	0.44

Mechanical Connectors

Aluminum Three Barrel Panel Board Connectors Two Hole Mount

Features

- Three conductor design panel board
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-8 mounting holes

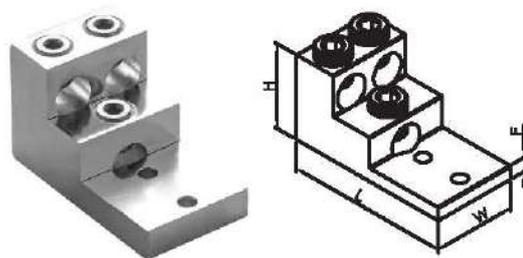

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99053	350 MCM	6 STR	5/16	3.85	1.97	2.01	0.31
99053A	350 MCM	6 STR	3/8	3.60	1.97	2.01	0.31
99057	600 MCM	2 STR	3/8	4.92	2.68	2.99	0.76
99061	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76
99061A	750 MCM	1/0 STR	1/2	4.92	2.83	2.99	0.76

Aluminum Three Barrel Panel Board Connectors Four Hole Mount

Features

- Three conductor design panel board
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Four mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-8 mounting holes

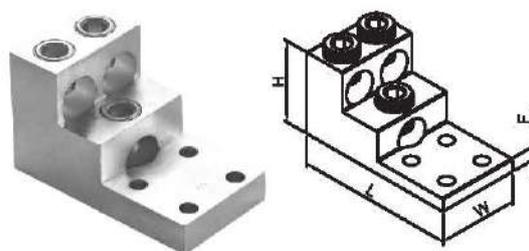

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99053-4	350 MCM	6 STR	5/16	3.60	1.97	2.01	0.31
99057-4	600 MCM	2 STR	3/8	4.92	2.68	2.99	0.76
99061-4	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76

Mechanical Connectors

Aluminum Three Barrel Panel Board Connectors Six Hole Mount

Features

- Three conductor design panel board
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Six mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-8 mounting holes

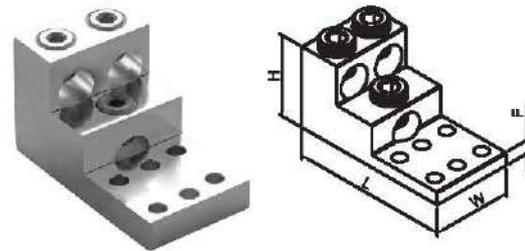

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99053-6	350 MCM	6 STR	5/16	3.60	1.97	2.01	0.31
99057-6	600 MCM	2 STR	3/8	4.92	2.68	2.99	0.76
99061-6	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76

Aluminum Three Barrel Panel Board Connectors I-Beam Style Two Hole Mount

Features

- Three conductor design I-Beam style
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-8 mounting holes

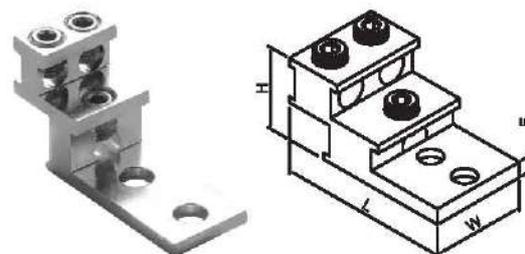

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99962	1/0 STR	14 AWG	3/8	3.00	1.10	1.49	0.16
99963	2/0 STR	14 AWG	3/8	3.00	1.10	1.49	0.19
99964	250 MCM	6 STR	3/8	3.60	1.60	1.05	0.22
99965	350 MCM	6 STR	3/8	3.81	1.80	2.16	0.25
99966	500 MCM	4 STR	3/8	5.50	2.60	3.00	0.31
99967	600 MCM	2 STR	3/8	5.50	2.60	3.00	0.38
99968	750 MCM	1/0 STR	3/8	6.00	2.80	3.78	0.44

Mechanical Connectors

Aluminum Four Barrel Panel Board Connectors Two Hole Mount

Features

- Four conductor design panel board
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating We Supply

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.
- Part number with suffix : 2-4 mounting holes

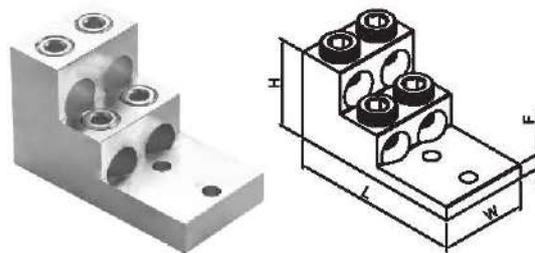

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99054	350 MCM	6 STR	5/16	3.60	1.97	2.01	0.31
99057A	600 MCM	2 STR	1/2	5.51	2.68	2.99	0.76
99058	600 MCM	2 STR	3/8	4.92	2.68	2.99	0.76
99058A	600 MCM	2 STR	1/2	5.51	2.68	2.99	0.76
99062	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76
99062A	750 MCM	1/0 STR	1/2	4.92	2.83	2.99	0.76

Aluminum Four Barrel Panel Board Connectors Four Hole Mount

Features

- Four conductor design panel board
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Four mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

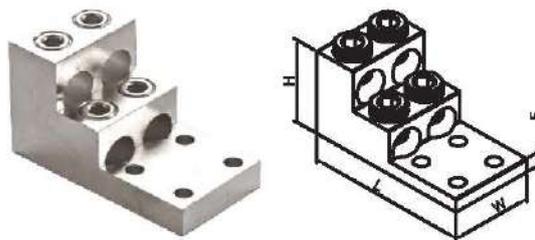

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99054-4	350 MCM	6 STR	5/16	3.60	1.97	2.01	0.31
99057-4	600 MCM	2 STR	3/8	4.92	2.68	2.99	0.76
99061-4	750 MCM	1/0 STR	3/8	4.92	2.83	2.99	0.76

Mechanical Connectors

Aluminum Four Barrel Panel Board Connectors I-Beam Style Two Hole Mount

Features

- Four conductor design I-Beam style
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Two mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish We Supply

- Aluminum • Tin plated • Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

Electrical Rating

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 2-4 mounting holes

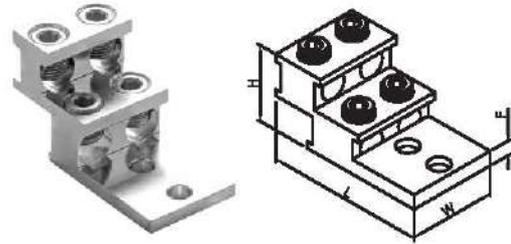

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99972	1/0 STR	14 AWG	3/8	3.00	1.10	1.49	0.19
99973	2/0 STR	14 AWG	3/8	3.00	1.10	1.49	0.19
99974	250 MCM	6 STR	3/8	3.60	1.60	1.05	0.25
99975	350 MCM	6 STR	3/8	3.81	1.80	2.16	0.25
99976	500 MCM	4 STR	3/8	5.50	2.60	3.00	0.38
99977	600 MCM	2 STR	3/8	5.50	2.60	3.00	0.38
99978	750 MCM	1/0 STR	3/8	6.00	2.80	3.78	0.44

Aluminum Six Barrel Panel Board Connectors I-Beam Style Four Hole Mount

Features

- Six conductor design I-Beam style
- Tin plating for corrosion resistance
- Applicable for circuit breaker
- Four mounting holes for position locking

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish We Supply

- Aluminum • Tin plated • Part number with suffix : 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

Electrical Rating

- Voltage : 600 V
- Temp : 90°C
- Part number with suffix : 2-4 mounting holes

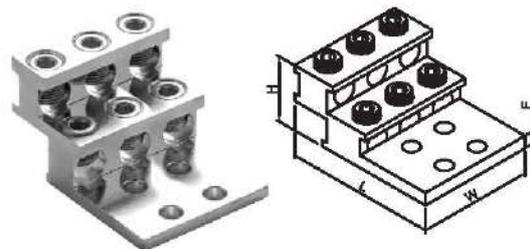

Catalog ID	Conductor Range		Stud Hole Size	Dimensions In Inches			
	Max	Min		L	W	H	F
99982	1/0 STR	14 AWG	3/8	3.00	1.55	1.49	0.19
99983	2/0 STR	14 AWG	3/8	3.00	1.55	1.49	0.19
99984	250 MCM	6 STR	3/8	3.60	2.20	1.05	0.22
99985	350 MCM	6 STR	3/8	3.81	2.50	2.16	0.25
99986	500 MCM	4 STR	3/8	5.50	3.60	3.00	0.38
99987	600 MCM	2 STR	3/8	5.50	3.60	3.00	0.38
99988	750 MCM	1/0 STR	3/8	6.00	3.60	3.78	0.44

Mechanical Connectors

Solar Combiner Node Mechanical (Scnm)


Features

- Tin plating for corrosion resistance
- Designed for insulators up to 2000 volts

Applications

- Conductors range output 1000 kcmil-6 AWG class B,C,G,H,I,K,L and DLO
- Configuration 18 to 42 string inputs and 4 outputs for application versatility

- Material Finish
- Aluminum • Tin plated

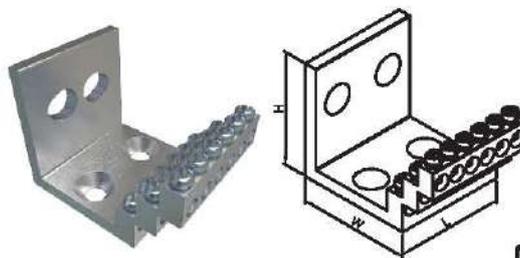

Catalog ID	Conductor Range Main		No Of Ports Main	Conductor Range Tap	No Of Port Tap	L	W	H	Mounting Hole Spacing	Hole Spacing Tap
	Max	Min								
OEC-CNM-18	4 STR	14 SOL/STR	18	1000 KCMIL-6 AWG	1-4	2.14	2.92	2.25	1.25	0.70
OEC-CNM-21	4 STR	14 SOL/STR	21	1000 KCMIL-6 AWG	1-4	2.47	2.92	2.25	1.50	1.00
OEC-CNM-24	4 STR	14 SOL/STR	24	1000 KCMIL-6 AWG	1-4	2.87	2.92	2.25	1.75	1.40
OEC-CNM-27	4 STR	14 SOL/STR	27	1000 KCMIL-6 AWG	1-4	3.19	2.92	2.25	2.00	1.75
OEC-CNM-30	4 STR	14 SOL/STR	30	1000 KCMIL-6 AWG	1-4	3.54	2.92	2.25	2.50	1.75
OEC-CNM-33	4 STR	14 SOL/STR	33	1000 KCMIL-6 AWG	1-4	3.89	2.92	2.25	3.00	1.75
OEC-CNM-36	4 STR	14 SOL/STR	36	1000 KCMIL-6 AWG	1-4	4.24	2.92	2.25	3.00	1.75
OEC-CNM-39	4 STR	14 SOL/STR	39	1000 KCMIL-6 AWG	1-4	4.59	2.92	2.25	3.00	1.40
OEC-CNM-42	4 STR	14 SOL/STR	42	1000 KCMIL-6 AWG	1-4	4.94	2.92	2.25	3.00	1.75

Snowman Connector For Two Conductor One Hole Mount

Features

- Single conductor design snowman style
- Tin plating for corrosion resistance
- Easy to installation


Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

- Material Finish
- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

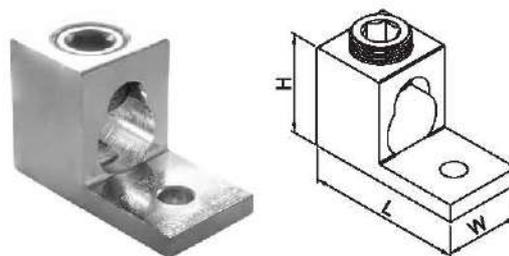

Catalog ID	Conductor Range		Conductor	Dimensions In Inches					
	Max	Min		Conductor	L	W	H		
99091	350 MCM	4 STR	1	2/0 STR	6 STR	2	2.25	1.12	1.25
99092	500 MCM	1/0 STR	1	250 STR	4 STR	2	2.81	1.29	1.82
99093	600 MCM	1/0 STR	1	250 STR	4 STR	2	2.81	1.29	1.82
99094	750 MCM	1/0 STR	1	300 MCM	2 STR	2	2.81	1.29	1.82

Mechanical Connectors

Snowman Connectors For Two Conductor Two Hole Mount


Features

- Single conductor design snowman style
- Tin plating for corrosion resistance
- Easy to installion
- Two mounting holes for position locking

Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material	Finish	Electrical Rating
• Aluminum	• Tin plated	• Voltage : 600 V • Temp : 90°C

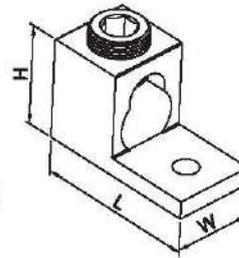

Catalog ID	Conductor Range						Dimensions In Inches		
	Max	Min	Conductor	Max	Min	Conductor	L	W	H
99091-2S	350 MCM	4 STR	1	2/0 STR	6 STR	2	4.00	1.16	1.25
99992-2S	500 MCM	1/0 STR	1	250 MCM	4 STR	2	4.56	1.29	1.82
99093-2S	600 MCM	1/0 STR	1	250 MCM	4 STR	2	4.56	1.29	1.82
99094-2S	750 MCM	1/0 STR	1	300 MCM	2 STR	2	4.56	1.29	1.82
99095-2S	750 MCM	1/0 STR	1	300 MCM	2 STR	2	4.56	1.29	1.82

Snowman Connectors For Two Conductor With Anti Rotation One Hole Mount

Features

- Single conductor design snowman style
- Tin plating for corrosion resistance
- Easy to installion
- Anti rotation feature for position locking


Applications

- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material	Finish
• Aluminum	• Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

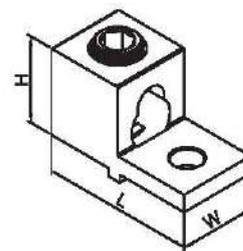

Catalog ID	Conductor Range						Dimensions In Inches		
	Max	Min	Conductor	Max	Min	Conductor	L	W	H
99091-AR	350 MCM	4 STR	1	2/0 STR	6 STR	2	2.25	1.12	1.25
99992-AR	500 MCM	1/0 STR	1	250 MCM	6 STR	2	2.81	1.29	1.82
99093-AR	600 MCM	1/0 STR	1	250 MCM	4 STR	2	2.81	1.29	1.82
99094-AR	750 MCM	1/0 STR	1	300 MCM	4 STR	2	2.81	1.29	1.82
99095-AR	750 MCM	1/0 STR	1	300 MCM	2 STR	2	2.81	1.29	1.82

Mechanical Connectors

Aluminum Lay In Lugs

Features

- Lay in feature
- Tin plating for corrosion resistance
- Easy to install

Applications


- Dual rated for copper and aluminum conductors
- Connectors suitable for application upto 35 KV

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

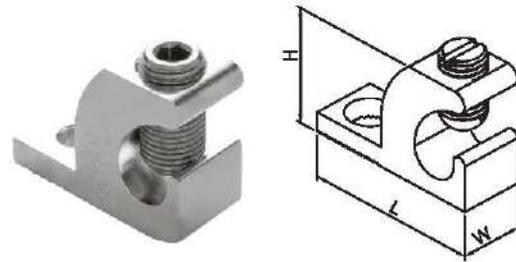

Catalog ID	Conductor Range		Conductor	Dimensions In Inches			
	Max	Min		L	W	H	F
50041A	4 AWG	14 AWG	4 AWG	8 AWG	1.06	0.37	0.75
50041AS26	4 AWG	14 AWG	4 AWG	8 AWG	1.06	0.37	0.75
50042A	1/0 AWG	14 AWG	1/0 AWG	8 AWG	1.50	0.60	1.16
50043A	3/0 AWG	6 SOL	3/0 AWG	6 SOL	2.00	0.78	1.50
50044A	250 MCM	6 SOL	250 MCM	6 SOL	2.20	0.80	1.70

Mechanical Connectors

Aluminum Neutral Bars With Robertson Screw

Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance

Applications


- Used for neutral or grounding multiple connections / splicing for distributions

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

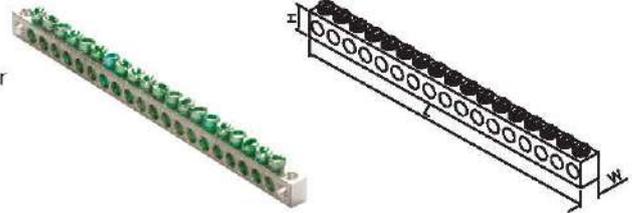

Catalog ID	Conductor Range				No Of Circuit	No Of Holes	Holes Spacing	Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min				L	W	H
22401	4 STR	14 SOL/STR	4 STR	12 SOL/STR	2	3	0.31	0.95	0.31	0.44
22402	4 STR	14 SOL/STR	4 STR	12 SOL/STR	4	5	0.31	1.57	0.31	0.44
22403	4 STR	14 SOL/STR	4 STR	12 SOL/STR	5	6	0.31	1.88	0.31	0.44
22404	4 STR	14 SOL/STR	4 STR	12 SOL/STR	6	7	0.31	2.25	0.31	0.44
22405	4 STR	14 SOL/STR	4 STR	12 SOL/STR	4	6	0.31	1.88	0.31	0.44
22406	4 STR	14 SOL/STR	4 STR	12 SOL/STR	5	7	0.31	2.25	0.31	0.44
22407	4 STR	14 SOL/STR	4 STR	12 SOL/STR	5	7	0.31	2.25	0.31	0.44
22408	4 STR	14 SOL/STR	4 STR	12 SOL/STR	6	8	0.31	2.56	0.31	0.44
22409	4 STR	14 SOL/STR	4 STR	12 SOL/STR	7	9	0.31	2.87	0.31	0.44
22410	4 STR	14 SOL/STR	4 STR	12 SOL/STR	9	11	0.31	3.50	0.31	0.44
22411	4 STR	14 SOL/STR	4 STR	12 SOL/STR	10	12	0.31	3.81	0.31	0.44
22412	4 STR	14 SOL/STR	4 STR	12 SOL/STR	12	14	0.31	4.43	0.31	0.44
22413	4 STR	14 SOL/STR	4 STR	12 SOL/STR	15	17	0.31	5.37	0.31	0.44
22414	4 STR	14 SOL/STR	4 STR	12 SOL/STR	20	22	0.31	6.93	0.31	0.44
22415	4 STR	14 SOL/STR	4 STR	12 SOL/STR	190	190	0.31	60.0	0.31	0.44
22416	2 STR	14 SOL/STR	2 STR	12 SOL/STR	10	12	0.34	4.12	0.38	0.50
22417	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	2	3	0.60	1.75	0.56	0.75
22418	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	3	5	0.60	2.95	0.56	0.75
22419	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	6	8	0.60	4.75	0.56	0.75

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position

Mechanical Connectors

Aluminum Neutral Bars With Robertson Screw

Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications


- Used for neutral or gronding multiple connections / splicing for distributions

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

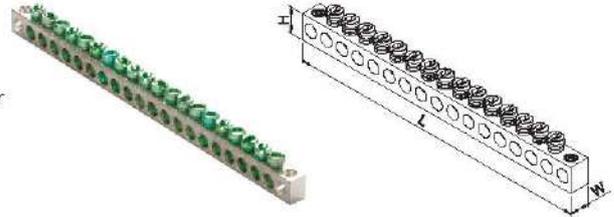

Catalog ID	Conductor Range				No Of Circuit	No Of Holes	Holes Spacing	Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min				L	W	H
22401G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	2	3	0.31	0.95	0.31	0.44
22402G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	4	5	0.31	1.57	0.31	0.44
22403G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	5	6	0.31	1.88	0.31	0.44
22404G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	6	7	0.31	2.25	0.31	0.44
22405G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	4	6	0.31	1.88	0.31	0.44
22406G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	5	7	0.31	2.25	0.31	0.44
22407G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	5	7	0.31	2.25	0.31	0.44
22408G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	6	8	0.31	2.56	0.31	0.44
22409G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	7	9	0.31	2.87	0.31	0.44
22410G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	9	11	0.31	3.50	0.31	0.44
22411G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	10	12	0.31	3.81	0.31	0.44
22412G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	12	14	0.31	4.43	0.31	0.44
22413G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	15	17	0.31	5.37	0.31	0.44
22414G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	20	22	0.31	6.93	0.31	0.44
22415G	4 STR	14 SOL/STR	4 STR	12 SOL/ STR	190	190	0.31	60.0	0.31	0.44

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position

Mechanical Connectors

Aluminum Neutral Bars

Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance

Applications


- Used for neutral or grounding multiple connections / splicing for distributions

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

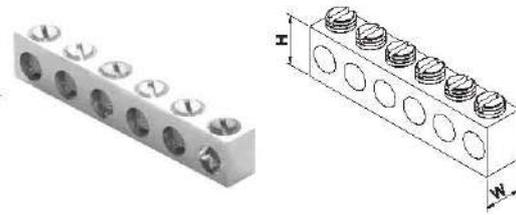

Catalog ID	Conductor Range				No Of Circuit	Dimensions In Inches	
	CU Max	CU Min	AL Max	AL Min		W	H
22431 A-C-S-M	6 STR	14 SOL/STR	6 STR	12 SOL/STR	2 TO 190	0.49	0.58
22432 A-C-S-M	4 STR	14 SOL/STR	4 STR	12 SOL/STR	2 TO 190	0.49	0.58
22433 A-C-S-M	2 STR	14 SOL/STR	2 STR	12 SOL/STR	2 TO 190	0.63	0.87
22434 A-C-S-M	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	2 TO 190	0.63	0.87
22435 A-C-S-M	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	2 TO 190	0.69	0.94
22436 A-C-S-M	250 STR	6 STR	250 MCM	6 STR	2 TO 190	0.87	1.12
22437 A-C-S-M	300 STR	4 STR	300 MCM	4 STR	2 TO 190	0.90	1.32
22438 A-C-S-M	350 STR	6 STR	350 MCM	6 STR	2 TO 190	1.12	1.63
22439 A-C-S-M	500 STR	6 STR	500 MCM	6 STR	2 TO 190	1.26	1.63
22440 A-C-S-M	600 STR	4 STR	600 MCM	4 STR	2 TO 190	1.26	1.63
22441 A-C-S-M	750 STR	250 MCM	750 MCM	250 MCM	2 TO 190	1.44	2.00

The Number of outlets, outlets spacing and mounting hole locations can be established according to individual requirements.

C in Part number : Denote Number of circuit 2 to 190

S in Part Number : Denote Number of Screw 2 to 190

MM in Part Number : Denote first & Second Mounting Hole Positions any two for hole 1 to 190

Mechanical Connectors

Copper Neutral Bars


Features

- High conductivity
- Tin plating for corrosion resistance
- Rated for copper conductors only

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Material	Finish	Electrical Rating
• Copper	• Tin plated	• Voltage : 600 V • Temp : 90°C

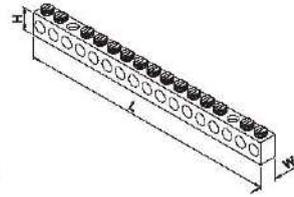

Catalog ID	Conductor Range		No Of Circuit	No Of Holes	Holes Spacing	Dimensions In Inches		
	CU Max	CU Min				L	W	H
22420	4 STR	14 SOL/STR	4	6	0.312	1.94	0.31	0.44
22421	4 STR	14 SOL/STR	5	7	0.312	2.25	0.31	0.44
22422	4 STR	14 SOL/STR	6	8	0.312	2.56	0.31	0.44
22423	4 STR	14 SOL/STR	12	14	0.312	4.43	0.31	0.44
22424	4 STR	14 SOL/STR	13	15	0.312	4.74	0.31	0.44
22425	4 STR	14 SOL/STR	13	15	0.312	4.74	0.31	0.44
22425	4 STR	14 SOL/STR	190	190	0.312	60.0	0.31	0.44
22427	2 STR	14 SOL/STR	3	5	0.3172	2.00	0.38	0.50
22428	2 STR	14 SOL/STR	6	8	0.3172	3.25	0.38	0.50

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position

Copper Neutral Bars With Robertson Screw



Features

- High conductivity
- Tin plating for corrosion resistance
- Assembled with robertson screw
- Rated for copper conductors only

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Material	Finish	Electrical Rating
• Copper	• Tin plated	• Voltage : 600 V • Temp : 90°C

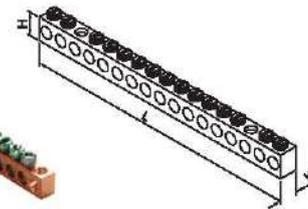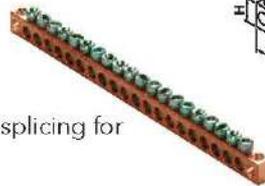

Catalog ID	Conductor Range		No Of Circuit	No Of Holes	Holes Spacing	Dimensions In Inches		
	CU Max	CU Min				L	W	H
22420G	4 STR	14 SOL/STR	4	6	0.312	1.94	0.31	0.44
22421G	4 STR	14 SOL/STR	5	7	0.312	2.25	0.31	0.44
22422G	4 STR	14 SOL/STR	6	8	0.312	2.56	0.31	0.44
22423G	4 STR	14 SOL/STR	12	14	0.312	4.43	0.31	0.44
22424G	4 STR	14 SOL/STR	13	15	0.312	4.74	0.31	0.44
22425G	4 STR	14 SOL/STR	13	15	0.312	4.74	0.31	0.44
22425G	4 STR	14 SOL/STR	190	190	0.312	60.0	0.31	0.44
22427G	2 STR	14 SOL/STR	3	5	0.397	2.00	0.38	0.50
22428G	2 STR	14 SOL/STR	6	8	0.397	3.25	0.38	0.50

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position

Mechanical Connectors

Copper Neutral Bars

Features

- High conductivity
- Tin plating for corrosion resistance
- Rated for copper conductors only

Applications


- Used for neutral or grounding multiple connections / splicing for distributions

Material Finish

- Copper
- Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

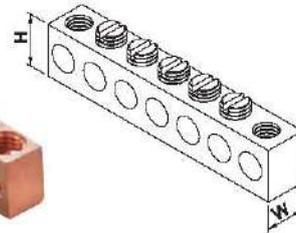

Catalog ID	Conductor Range		No Of Circuit	Dimensions In Inches	
	CU Max	CU Min		W	H
22431 AC-C-M	6 STR	14 SOL/STR	2 TO 190	0.49	0.58
22432 AC-C-M	4 STR	14 SOL/STR	2 TO 190	0.49	0.58
22433 AC-C-M	2 STR	14 SOL/STR	2 TO 190	0.63	0.87
22434 AC-C-M	1/0 STR	14 SOL/STR	2 TO 190	0.63	0.87
22435 AC-C-M	2/0 STR	14 SOL/STR	2 TO 190	0.69	0.94
22436 AC-C-M	250 MCM	6 STR	2 TO 190	0.87	1.12
22437 AC-C-M	300 MCM	4 STR	2 TO 190	0.90	1.32
22438 AC-C-M	350 MCM	6 STR	2 TO 190	1.12	1.63
22439 AC-C-M	500 MCM	6 STR	2 TO 190	1.26	1.63
22440 AC-C-M	600 MCM	4 STR	2 TO 190	1.26	1.63
22441 AC-C-M	750 MCM	250 MCM	2 TO 190	1.44	2.00

The Number of outlets, outlets spacing and mounting hole locations can be established according to individual requirements.

C in Part number : Denote Number of circuit 2 to 190

S in Part Number : Denote Number of Screw 2 to 190

MM in Part Number : Denote first & Second Mounting Hole Positions any two for hole 1 to 190

Mechanical Connectors

Aluminum Neutral Bars I-Beam Style


Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications

- use in conjunction with customized connector

Material	Finish	Electrical Rating
• Aluminum	• Tin plated	• Voltage : 600 V
		• Temp : 90°C

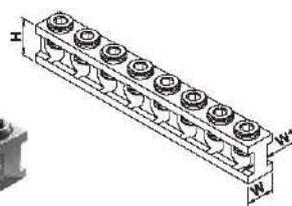

Catalog ID	Conductor Range				No Of Circuit	Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min		W	W1	H
22431 B-C-S-M	6 STR	14 SOL/STR	6 STR	12 SOL/STR	2 TO 190	0.31	0.24	0.44
22432 B-C-S-M	4 STR	14 SOL/STR	4 STR	12 SOL/STR	2 TO 190	0.31	0.24	0.50
22432 BHD-C-S-M	4 STR	14 SOL/STR	4 STR	12 SOL/STR	2 TO 190	0.38	0.24	0.50
22432 BHD1-C-S-M	4 STR	14 SOL/STR	4 STR	12 SOL/STR	2 TO 190	0.45	0.35	0.43
22433 B-C-S-M	2 STR	14 SOL/STR	2 STR	12 SOL/STR	2 TO 190	0.47	0.29	0.57
22434 B-C-S-M	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	2 TO 190	0.56	0.35	0.75
22435 B-C-S-M	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	2 TO 190	0.56	0.35	0.75
22436 B-C-S-M	250 STR	6 STR	250 MCM	6 STR	2 TO 190	0.86	0.47	1.00
22437 B-C-S-M	300 STR	4 STR	300 MCM	4 STR	2 TO 190	0.86	0.47	1.10
22438 B-C-S-M	350 STR	6 STR	350 MCM	6 STR	2 TO 190	0.86	0.47	1.10
22439 B-C-S-M	500 STR	6 STR	500 MCM	6 STR	2 TO 190	0.90	0.51	1.32
22440 B-C-S-M	600 STR	4 STR	600 MCM	4 STR	2 TO 190	1.12	0.63	1.63
22441 B-C-S-M	750 STR	250 MCM	750 MCM	250 MCM	2 TO 190	1.43	0.80	2.00

The Number of outlets, outlets spacing and mounting hole locations can be established according to individual requirements.

C in Part number : Denote Number of circuit 2 to 190

S in Part Number : Denote Number of Screw 2 to 190

MM in Part Number : Denote first & Second Mounting Hole Positions any two for hole 1 to 190

Mechanical Connectors

Aluminum Neutral Bars Multiple Combination


Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Material	Finish	Electrical Rating
• Aluminum	• Tin plated	• Voltage : 600 V • Temp : 90°C

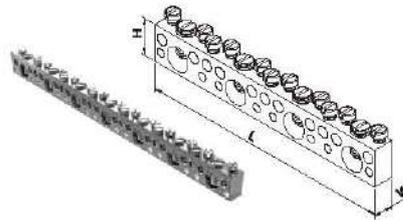

Catalog ID	No.OF Circuit For AL		No.OF Circuit For AL		Dimensions In Inches		
	1/0-14 AWG	6-14 AWG	1/0-12 AWG	6-12 AWG	L	W	H
OEC-CB-1/0-3-8	03	08	03	08	3.50	0.38	0.62
OEC-CB-1/0-5-14	05	14	05	14	5.80	0.38	0.62
OEC-CB-1/0-6-17	06	17	06	17	7.00	0.38	0.62
OEC-CB-1/0-7-20	07	20	07	20	8.20	0.38	0.62
OEC-CB-1/0-8-23	08	23	08	23	9.40	0.38	0.62
OEC-CB-1/0-9-26	09	26	09	26	10.60	0.38	0.62
OEC-CB-1/0-10-29	10	29	10	29	11.80	0.38	0.62
OEC-CB-1/0-30-90	30	90	30	90	36.00	0.38	0.62

- OEC-CB-1/0-A-B : A denote no of holes for conductor # 6-14 and
B denote no of holes for conductor # 1/0-14

Aluminum Neutral Bars Multiple Combination


Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Material	Finish	Electrical Rating
• Aluminum	• Tin plated	• Voltage : 600 V • Temp : 90°C

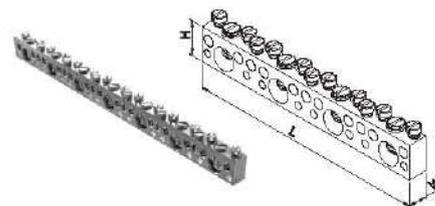

Catalog ID	No.OF Circuit For AL		No.OF Circuit For AL		Dimensions In Inches		
	2/0-14 AWG	6-14 AWG	2/0-12 AWG	6-12 AWG	L	W	H
OEC-CB-2/0-3-8	03	08	03	08	3.50	0.38	0.62
OEC-CB-2/0-5-14	05	14	05	14	5.80	0.38	0.62
OEC-CB-2/0-6-17	06	17	06	17	7.00	0.38	0.62
OEC-CB-2/0-7-20	07	20	07	20	8.20	0.38	0.62
OEC-CB-2/0-8-23	08	23	08	23	9.40	0.38	0.62
OEC-CB-2/0-9-26	09	26	09	26	10.60	0.38	0.62
OEC-CB-2/0-10-29	10	29	10	29	11.80	0.38	0.62
OEC-CB-2/0-30-90	30	90	30	90	36.00	0.38	0.62

- OEC-CB-2/0-A-B : A denote no of holes for conductor # 6-14 and
B denote no of holes for conductor # 2/0-14

Mechanical Connectors

Aluminum Neutral Bars Multiple Combination

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications

- Used for neutral or gronding multiple connections / splicing for distributions

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V
- Temp: 90°C

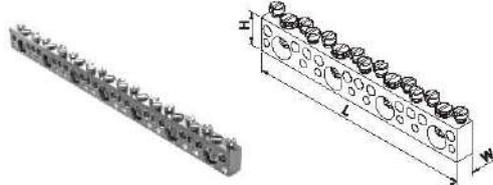

- OEC-CB-1/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 1/0-14

Catalog ID	No.OF Circuit For AL		No.OF Circuit For AL		Dimensions In Inches		
	1/0-14 AWG OR 2/3 COND OF #10 AWG	6-14 AWG OR 2 COND OF #10-14 AWG	1/0-12 AWG OR 2/3 COND OF #10 AWG	6-14 AWG OR 2 COND OF #10-14 AWG	L	W	H
OEC-ECB-1/0-3-8	03	08	03	08	3.50	0.38	0.62
OEC-ECB-1/0-5-14	05	14	05	14	5.80	0.38	0.62
OEC-ECB-1/0-6-17	06	17	06	17	7.00	0.38	0.62
OEC-ECB-1/0-7-20	07	20	07	20	8.20	0.38	0.62
OEC-ECB-1/0-8-23	08	23	08	23	9.40	0.38	0.62
OEC-ECB-1/0-9-26	09	26	09	26	10.60	0.38	0.62
OEC-ECB-1/0-10-29	10	29	10	29	11.80	0.38	0.62
OEC-ECB-1/0-10-90	30	90	30	90	36.00	0.38	0.62

Aluminum Neutral Bars Multiple Combination

Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Assembled with robertson screw

Applications


- Used for neutral or gronding multiple connections / splicing for distributions

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

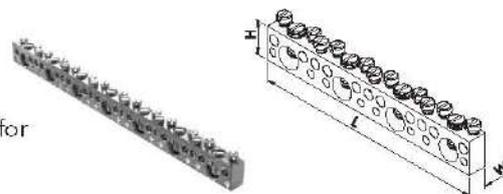

- OEC-CB-1/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 2/0-14

Catalog ID	No.OF Circuit For AL		No.OF Circuit For AL		Dimensions In Inches		
	2/0-14 AWG OR 2/3 COND OF #10 AWG	6-14 AWG OR 2 COND OF #10-14 AWG	2/0-12 AWG OR 2/3 COND OF #10 AWG	6-14 AWG OR 2 COND OF #10-14 AWG	L	W	H
OEC-ECB-2/0-3-8	03	08	03	08	3.50	0.38	0.62
OEC-ECB-2/0-5-14	05	14	05	14	5.80	0.38	0.62
OEC-ECB-2/0-6-17	06	17	06	17	7.00	0.38	0.62
OEC-ECB-2/0-7-20	07	20	07	20	8.20	0.38	0.62
OEC-ECB-2/0-8-23	08	23	08	23	9.40	0.38	0.62
OEC-ECB-2/0-9-26	09	26	09	26	10.60	0.38	0.62
OEC-ECB-2/0-10-29	10	29	10	29	11.80	0.38	0.62
OEC-ECB-2/0-10-90	30	90	30	90	36.00	0.38	0.62

Mechanical Connectors

Copper Neutral Bars Multiple Combination

Features

- High conductivity
- Tin plating for corrosion resistance

Applications


- Used for neutral or grounding multiple connections / splicing for distributions

Material Finish

- Copper
- Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

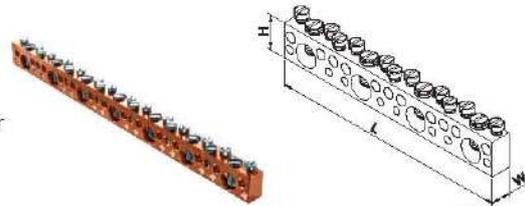

Catalog ID	No.OF Circuit For CU 1/0-14 AWG	No.OF Circuit For CU 6-14 AWG	Dimensions In Inches		
			L	W	H
OEC-CCB-1/0-3-8	03	08	3.50	0.38	0.62
OEC-CCB-1/0-5-14	05	14	5.80	0.38	0.62
OEC-CCB-1/0-6-17	06	17	7.00	0.38	0.62
OEC-CCB-1/0-7-20	07	20	8.20	0.38	0.62
OEC-CCB-1/0-8-23	08	23	9.40	0.38	0.62
OEC-CCB-1/0-9-26	09	26	10.60	0.38	0.62
OEC-CCB-1/0-10-29	10	29	11.80	0.38	0.62
OEC-CCB-1/0-30-90	30	90	36.00	0.38	0.62

- OEC-CCB-1/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 1/0-14

Copper Neutral Bars Multiple Combination

Features

- High conductivity
- Tin plating for corrosion resistance

Applications


- Used for neutral or grounding multiple connections / splicing for distributions

Material Finish

- Copper
- Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

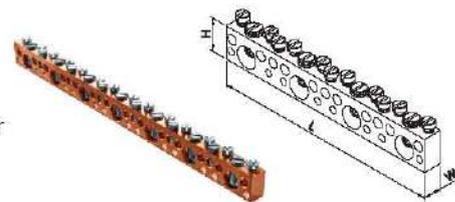

Catalog ID	No.OF Circuit For CU 2/0-14 AWG	No.OF Circuit For CU 6-14 AWG	Dimensions In Inches		
			L	W	H
OEC-CCB-2/0-3-8	03	08	3.50	0.38	0.62
OEC-CCB-2/0-5-14	05	14	5.80	0.38	0.62
OEC-CCB-2/0-6-17	06	17	7.00	0.38	0.62
OEC-CCB-2/0-7-20	07	20	8.20	0.38	0.62
OEC-CCB-2/0-8-23	08	23	9.40	0.38	0.62
OEC-CCB-2/0-9-26	09	26	10.60	0.38	0.62
OEC-CCB-2/0-10-29	10	29	11.80	0.38	0.62
OEC-CCB-2/0-30-90	30	90	36.00	0.38	0.62

- OEC-CCB-2/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 2/0-14

Mechanical Connectors

Copper Neutral Bars Multiple Combination

Features

- High conductivity
- Tin plating for corrosion resistance

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Electrical Rating

- Voltage : 600 V
- Temp : 90°C


Material

- Copper

Finish

- Tin plated

- OEC-ECCB-1/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 1/0-14

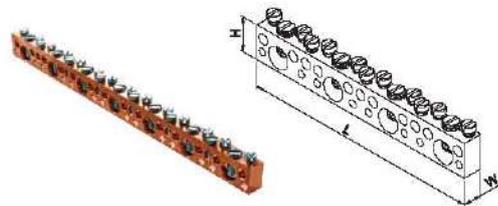

Catalog ID	No. OF Circuit For 1/0-14 AWG Or 2/3 COND Of #10 AWG With 2 COND 10-14 AWG	No. OF Circuit For 6-14 AWG Or 2/3 COND Of #10 AWG With 2 COND 10-14 AWG	Dimensions In Inches		
			L	W	H
OEC-ECCB-1/0-3-8	03	08	3.50	0.38	0.62
OEC-ECCB-1/0-5-14	05	14	5.80	0.38	0.62
OEC-ECCB-1/0-6-17	06	17	7.00	0.38	0.62
OEC-ECCB-1/0-7-20	07	20	8.20	0.38	0.62
OEC-ECCB-1/0-8-23	08	23	9.40	0.38	0.62
OEC-ECCB-1/0-9-26	09	26	10.60	0.38	0.62
OEC-ECCB-1/0-10-29	10	29	11.80	0.38	0.62
OEC-ECCB-1/0-30-90	30	90	36.00	0.38	0.62

Copper Hollow Neutral Bars

Features

- High conductivity
- Tin plating for corrosion resistance

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Electrical Rating


- Voltage : 600 V
- Temp : 90°C

Material

- Copper

Finish

- Tin plated

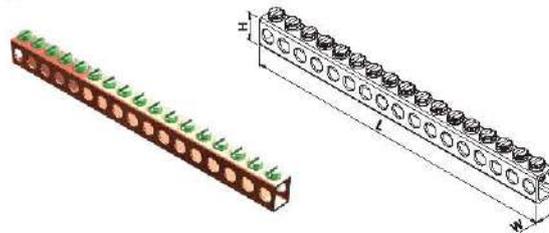

Catalog ID	Line Conductor Range		Circuit Conducto Range		No Of Circuit	Dimensions In Inches		
	Max	Min	Max	Min		L	W	H
22601	4 STR	14 SOL/STR	6 STR	14 SOL/STR	2	0.86	0.31	0.44
22602	4 STR	14 SOL/STR	6 STR	14 SOL/STR	4	1.25	0.31	0.44
22603	4 STR	14 SOL/STR	6 STR	14 SOL/STR	5	1.65	0.31	0.44
22604	4 STR	14 SOL/STR	6 STR	14 SOL/STR	6	2.00	0.31	0.44
22605	4 STR	14 SOL/STR	6 STR	14 SOL/STR	8	2.43	0.31	0.44
22607	4 STR	14 SOL/STR	6 STR	14 SOL/STR	10	3.22	0.31	0.44
22609	4 STR	14 SOL/STR	6 STR	14 SOL/STR	12	4.00	0.31	0.44
22611	4 STR	14 SOL/STR	6 STR	14 SOL/STR	14	4.80	0.31	0.44
22613	4 STR	14 SOL/STR	6 STR	14 SOL/STR	18	5.58	0.31	0.44
22619	4 STR	14 SOL/STR	6 STR	14 SOL/STR	20	7.95	0.31	0.44
22629	4 STR	14 SOL/STR	6 STR	14 SOL/STR	21	11.88	0.31	0.44
22689	4 STR	14 SOL/STR	6 STR	14 SOL/STR	190	7.55	0.31	0.44

Mechanical Connectors

Copper Neutral Bars Multiple Combination

Features

- High conductivity
- Tin plating for corrosion resistance

Applications

- Used for neutral or grounding multiple connections / splicing for distributions

Electrical Rating

- Voltage : 600 V
- Temp : 90°C


Material

- Copper

Finish

- Tin plated

- OEC-ECCB-2/0-A-B : A denote no of holes for conductor # 6-14 and B denote no of holes for conductor # 2/0-14

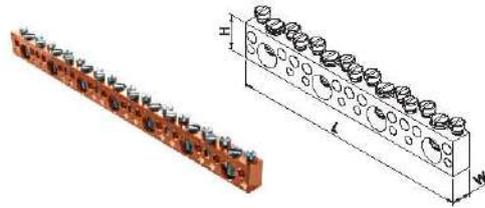

Catalog ID	No.OF Circuit For 1/0-14 AWG Or 2/3 COND Of #10 AWG With 2 COND 10-14 AWG	No.OF Circuit For 6-14 AWG Or 2/3 COND Of #10 AWG With 2 COND 10-14 AWG	Dimensions In Inches		
			L	W	H
OEC-ECCB-2/0-3-8	03	08	3.50	0.38	0.62
OEC-ECCB-2/0-5-14	05	14	5.80	0.38	0.62
OEC-ECCB-2/0-6-17	06	17	7.00	0.38	0.62
OEC-ECCB-2/0-7-20	07	20	8.20	0.38	0.62
OEC-ECCB-2/0-8-23	08	23	9.40	0.38	0.62
OEC-ECCB-2/0-9-26	09	26	10.60	0.38	0.62
OEC-ECCB-2/0-10-29	10	29	11.80	0.38	0.62
OEC-ECCB-2/0-30-90	30	90	36.00	0.38	0.62

Transformer Luges Kit

Features

- Tin plating for corrosion resistance
- Dual rated for copper and aluminum conductors

Applications

- Easy to installtion
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material

- Aluminum

Finish

- tin plated



Catalog ID	Transformer KVA Size	Qty	Cond Range		Qty	Bolt	Qty	Nut	Qty	Washer
			Min-	Max						
99000SK1	15-37 1/2 1-PHASE	8	3.50		8	1/4 X 3/4 Lg	8	1/4- 20	-	CAPTIVE TO NUT
99000SK2	15-37 1/2 1 PHASE	8	5.80		8	1/4 X 3/4 Lg	8	1/4- 20	-	CAPTIVE TO NUT
	15-45 3-PHASE	4								
99000SK3	15-75 1 PHASE	12	7.00		8	1/4 X 3/4 Lg	16	1/4- 20	-	CAPTIVE TO NUT
	75-112 1/2 3-PHASE									
99000SK4	100-167 1- PHASE	3	8.20		3	1/4 X 3/4 Lg	3	1/4- 20	-	CAPTIVE TO NUT
99000SK5	100-167 1/2 1 PHASE	3	9.40		3	1/4 X 3/4 Lg	3	1/4- 20	-	CAPIVE TO NUT
	15-45 3-PHASE	22								
99000SK6	100-167 1-PHASE	6	10.60		5	1/2 X 3 Lg	11	1/2-13	22	1/2 FLAT
	150-300 3-PHASE	7			6	1/2 X 2.5 Lg				11
99000SK7	400-500 3-PHASE	15	11.80		7	1/2 X 2 Lg	11	1/2-13	22	1/2 FLAT
					4	1/2 X 2.5 Lg				11
99000SK8	500 3- PHASE	29	36.00		18	3/8 X 2 Lg	18	3/8-16	36 18	3/8 FLAT 3/8 BELLEVILLE

Mechanical Connectors

Aluminum Splicer/Reducer

Features

- Tin plating for corrosion resistance
- Dual rated for copper and aluminum conductors
- Desing maximum secureness

Applications


- Easy to installtion
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Aluminum • tin plated



Catalog ID	Conductor Range		Dimensions In Inches		
	Max	Min	L	W	H
61101	2 STR	14 SOL/STR	1.12	0.44	0.50
61101M	2 STR	14 SOL/STR	1.12	0.44	0.50
61101HD	2 STR	14 SOL/STR	1.38	0.50	0.56
61101HDM	2 STR	14 SOL/STR	1.38	0.50	0.56
61102	1/0 STR	14 SOL/STR	1.50	0.53	0.63
61102HD	1/0 STR	14 SOL/STR	1.90	0.75	0.75
61103	2/0 STR	8 SOL/STR	1.59	0.56	0.70
61104	4/0 STR	6 STR	2.00	0.84	1.00
61105	250 MCM	6 STR	2.00	0.84	1.10
61105HD	250 MCM	6 STR	1.94	1.00	1.13
61106	350 MCM	6 STR	2.63	1.00	1.13
61106HD	350 MCM	6 STR	2.63	1.13	1.19

Aluminum Double Screw Splicer/Reducer

Features

- Tin plating for corrosion resistance
- Dual rated for copper and aluminum conductors
- Two screw desing maximum secureness

Applications


- Easy to installtion
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Aluminum • tin plated

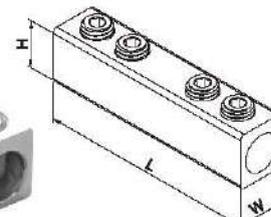

Catalog ID	Conductor Range		Dimensions In Inches		
	Max	Min	L	W	H
61107	250 MCM	6 STR	3.94	1.00	1.13
61108	350 MCM	6 STR	4.34	1.00	1.13
61108HD	350 MCM	6 STR	4.319	1.13	1.19
61109	550 MCM	2 STR	5.00	1.38	1.50
61110	750 MCM	500 MCM	6.25	1.63	1.75

Mechanical Connectors

Multiple Connectors-Aluminum Special Neutral Bars

Features

- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Mild steel screw SAE1008 with zinc plated

Applications

- Use in a variety of neutral or grounding application

Material Finish

- Aluminum • Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C



Catalog ID	Conductor Entry Hole	Conductor Range	Total No Of Holes For Conductor	Dimensions In Inches		
				L	W	H
OEC3282	B	2	01	2.50	0.50	0.50
	C	8	04			
	D	10&12	03			
OEC3283	B	2	01	3.00	0.50	0.50
	C	8	05			
	D	10&12	04			
OEC3284	B	2	01	3.53	0.50	0.50
	C	8	07			
	D	10&12	06			
OEC3286	A	1/0	01	4.86	0.50	0.50
	B	2	01			
	C	8	09			
	D	10&12	09			
OEC3286	A	1/0	01	5.88	0.50	0.50
	B	2	01			
	C	8	12			
	D	10&12	12			
OEC3287	A	1/0	01	7.39	0.50	0.50
	B	2	01			
	C	8	16			
	D	10&12	16			
OEC3288	A	1/0	01	9.04	0.50	0.5
	B	2	01			
	C	8	21			
	D	10&12	21			

Mechanical Connectors

Mechanical Tap Connectors Without Cover

Features

- Tin plating for corrosion resistance
- Dual rated for copper and aluminum conductors
- Secure snap cover eliminates need for taping

Applications


- Perpendicular tap allows for parallel or 'T' tap configuration
- Flexible cover allows for either parallel or 'T' tap wire entry

Material Finish

- Aluminum • tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

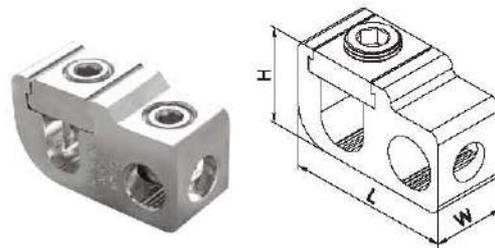

Catalog ID	Conductor Range		Tap Conductor Range				Dimensions In Inches			
	Main Fixed Size		CU Max	CU Min	AL Max	AL Min	L	W	W1	H
99071	2 STR	12 STR	4 STR	14 SOL	4 STR	12 SOL	0.80	0.93	0.63	0.89
99072	1/0 STR	12 STR	1/0 STR	14 SOL	1/0 STR	12 SOL	0.80	1.00	0.71	0.95
99073	250 MCM	1/0 STR	1/0 STR	14 SOL	1/0 STR	12 SOL	1.00	1.05	0.73	1.07
99074	250 MCM	1/0 STR	250 MCM	6 STR	250 MCM	6 STR	1.00	1.23	0.90	1.22
99075	350 MCM	4/0 STR	350 MCM	6 STR	350 MCM	6 STR	1.20	1.23	0.90	1.22
99076	500 MCM	350 MCM	500 MCM	2 STR	500 MCM	2 STR	1.00	1.23	0.90	1.22
99077	750 MCM	500 MCM	500 MCM	2 STR	500 MCM	2 STR	1.30	1.38	1.00	1.36
99078	750 MCM	500 MCM	750 MCM	1/0 STR	750 MCM	1/0 STR	1.60	1.65	1.22	1.63
99079	1000 MCM	750 MCM	500 MCM	2 STR	500 MCM	2 STR	1.70	1.75	1.32	1.75

Mechanical Tap Connectors With Cover

Features


- Tin plating for corrosion resistance
- Dual rated for copper and aluminum conductors
- Flexible to allow parallel or tap connection
- Can be supplied with individual cover

Applications

- Perpendicular tap allows for parallel or 'T' tap configuration
- Flexible cover allows for either parallel or 'T' tap wire entry

Material Finish Electrical Rating

- Aluminum • tin plated • Voltage : 600 V
- Temp : 90°C

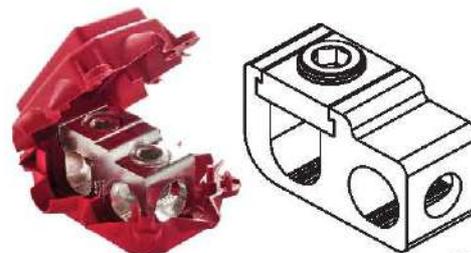

Catalog ID	Conductor Range		Tap Conductor Range				Dimensions In Inches				Color
	Main Fixed Size		CU Max	CU Min	AL Max	AL Min	L	W	W1	H	
99071C	2 STR	12 STR	4 STR	14 SOL	4 STR	12 SOL	2.19	1.91	1.18	0.06	YELLOW
99072C	1/0 STR	12 STR	1/0 STR	14 SOL	1/0 STR	12 SOL	2.64	2.21	1.30	0.06	GRAY
99073C	250 MCM	1/0 STR	1/0 STR	14 SOL	1/0 STR	12 SOL	3.47	2.92	1.77	0.06	RED
99074C	250 MCM	1/0 STR	250 MCM	6 STR	250 MCM	6 STR	3.47	2.92	1.77	0.06	
99075C	350 MCM	4/0 STR	350 MCM	6 STR	350 MCM	6 STR	3.78	3.31	1.85	0.06	YELLOW
99076C	500 MCM	350 MCM	500 MCM	2 STR	500 MCM	2 STR	4.65	3.43	2.36	0.06	BLUE
99077C	750 MCM	500 MCM	500 MCM	2 STR	500 MCM	2 STR	4.45	3.35	2.29	0.06	
99078C	750 MCM	500 MCM	750 MCM	1/0 STR	750 MCM	1/0 STR	4.43	3.35	2.29	0.06	ORANGE

Mechanical Connectors

Aluminum Box Terminal

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Customized features

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104	250 MCM	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105	500 MCM	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106	500 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111A	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Aluminum Box Terminal Anti-Rotation

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Anti-rotation rib for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LB-1	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LB-1	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LB-1	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LB-1	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LB-1	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LB-1	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LB-1	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LB-1	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LB-1	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LB-1	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LB-1	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LB-1	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALB-1	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Mechanical Connectors

Aluminum Box Terminal For Bottom Rail

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Bottom rail feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LB-2	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LB-2	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LB-2	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LB-2	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LB-2	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LB-2	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LB-2	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LB-2	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LB-2	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LB-2	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LB-2	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LB-2	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALB-2	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Aluminum Box Terminal For Bottom Rail & Right Angle Conductor Entry

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Bottom rail feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LBRT-2	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LBRT -2	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LBRT-2	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LBRT-2	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LBRT-2	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LBRT-2	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LBRT-2	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LBRT-2	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LBRT-2	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LBRT-2	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LBRT-2	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LBRT-2	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALBRT-2	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Mechanical Connectors

Aluminum Box Terminal Anti-Rotation Right Angle Conductor Entry

Features



- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Anti-rotation rib for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LBRT-1	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LBRT-1	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LBRT-1	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LBRT-1	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LBRT-1	250 MCM	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LBRT-1	500 MCM	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LBRT-1	500 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LBRT-1	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LBRT-1	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LBRT-1	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LBRT-1	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LBRT-1	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALBRT-1	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Aluminum Box Terminal For Extended Rail

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Extended rail feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LBE	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LBE	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LBE	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LBE	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LBE	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LBE	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LBE	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LBE	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LBE	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LBE	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LBE	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LBE	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALBE	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Mechanical Connectors

Aluminum Box Terminal For Extended Rail With Right Angle Conductor Entry

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Extended rail feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100LBERT	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101LBERT	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102LBERT	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103LBERT	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104LBERT	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105LBERT	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106LBERT	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107LBERT	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108LBERT	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109LBERT	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110LBERT	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111LBERT	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ALBERT	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Aluminum Box Terminal With Square Notch In The Bottom

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Square notch feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100SF1	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101SF1	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102SF1	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103SF1	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104SF1	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105SF1	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106SF1	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107SF1	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108SF1	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109SF1	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110SF1	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111SF1	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ASF1	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Mechanical Connectors

Aluminum Box Terminal With Two Small Foot

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Small foot feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

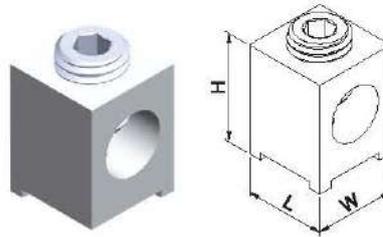

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100SF2	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101SF2	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102SF2	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103SF2	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104SF2	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105SF2	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106SF2	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107SF2	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108SF2	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109SF2	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110SF2	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111SF2	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111SF2	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Aluminum Box Terminal With Four Small Foot

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Small foot feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

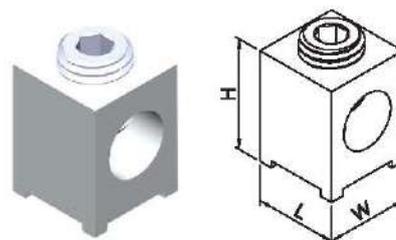

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99100SF4	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99101SF4	4 STR	14 SOL/STR	4 STR	12 SOL/STR	0.38	0.38	0.48
99102SF4	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.47	0.56
99103SF4	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.62	0.53	0.61
99104SF4	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.63	0.58	0.76
99105SF4	4/0 STR	6 STR	4/0 STR	6 STR	0.94	0.81	1.00
99106SF4	250 MCM	6 STR	250 MCM	6 STR	0.94	0.81	1.00
99107SF4	300 MCM	6 STR	300 MCM	6 STR	1.00	0.81	1.00
99108SF4	350 MCM	6 STR	350 MCM	6 STR	0.94	1.00	1.13
99109SF4	500 MCM	2 STR	500 MCM	2 STR	1.22	1.25	1.69
99110SF4	600 MCM	2 STR	600 MCM	2 STR	1.22	1.25	1.69
99111SF4	750 MCM	2 STR	750 MCM	2 STR	1.38	1.25	1.98
99111ASF4	750 MCM	2 STR	750 MCM	2 STR	1.44	1.95	2.00

Mechanical Connectors

Box Terminal Oval Shape

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Oval shape conductor entry

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

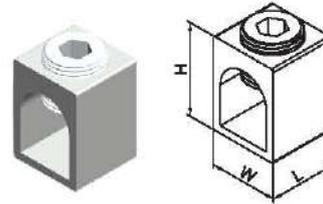

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LD	4 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HD	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408	350 MCM	2 STR	350 MCM	2 STR	0.87	0.91	1.24
99409	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.41
99410	600 MCM	2 STR	600 MCM	2 STR	1.38	1.23	1.41
99411	750 MCM	2 STR	750 MCM	2 STR	1.93	1.37	1.75

Box Terminal Oval Shape With Anti Rotation

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Oval shape conductor entry with anti rotation rib

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

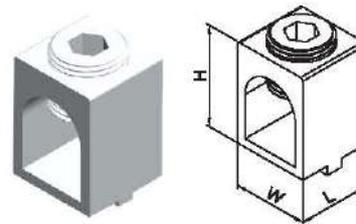

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401AR-C	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LDAR-C	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402AR-C	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403AR-C	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404AR-C	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HDAR-C	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405AR-C	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406AR-C	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407AR-C	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408AR-C	350 MCM	6 STR	350 MCM	6 STR	1.87	0.91	1.24
99409AR-C	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.14
99410AR-C	600 MCM	2 STR	600 MCM	2 STR	1.38	1.23	1.41
99411AR-C	750 MCM	500 MCM	750 MCM	500 STR	1.93	1.37	1.75

Mechanical Connectors

Box Terminal Oval Shape With Center Anti-Rotation

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Oval shape conductor entry with anti rotation rib

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

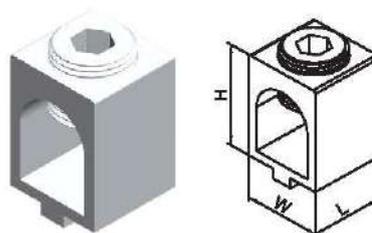

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401AR-C-90	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LDAR-C	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402AR-C-90	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403AR-C-90	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404AR-C-90	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HDAR-C-90	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405AR-C-90	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406AR-C-90	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407-AR-90	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408AR-C-90	350 MCM	6 STR	350 MCM	2 STR	0.87	0.91	1.24
99409-AR-90	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.41
99410-AR-90	600 MCM	2 STR	600 MCM	2 STR	1.38	1.23	1.41
99411-AR-90	750 MCM	500 MCM	750 MCM	500 MCM	1.93	1.37	1.75

Box Terminal Oval Shape With Side Anti-Rotation

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Oval shape conductor entry with anti rotation rib

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

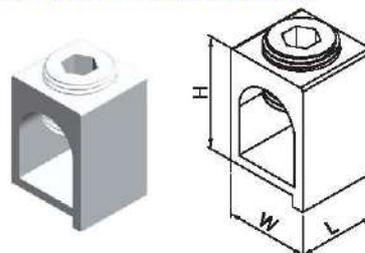

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401AR-S	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LDAR-S	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402AR-S	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403AR-S	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404AR-S	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HDAR-S	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405AR-S	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406AR-S	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407AR-S	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408AR-S	350 MCM	6 STR	350 MCM	6 STR	0.87	0.91	1.24
99409AR-S	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.41
99410AR-S	600 MCM	2 STR	600 MCM	2 STR	1.38	1.37	1.41
99411AR-S	750 MCM	500 MCM	750 MCM	500 MCM	1.93	1.37	1.75

Mechanical Connectors

Box Terminal Oval Shape With Rail

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Oval shape conductor entry with rail for anti rotation

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401-RL	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LD-RL	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402-RL	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403-RL	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404-RL	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HD-RL	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405-RL	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406-RL	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407-RL	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408-RL	350 MCM	6 STR	350 MCM	6 STR	0.87	0.91	1.24
99409-RL	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.41
99410-RL	600 MCM	2 STR	600 MCM	2 STR	1.38	1.23	1.41
99411-RL	750 MCM	500 MCM	750 MCM	500 MCM	1.93	1.37	1.75

Box Terminal Oval Shape With Small Foot

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Small foot feature for locking

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C



Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	CU Max	CU Min	AL Max	AL Min	L	W	H
99401-4SF	6 STR	14 SOL/STR	6 STR	12 SOL/STR	0.38	0.38	0.48
99402LD-4SF	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.46	0.57
99402-4SF	2 STR	14 SOL/STR	2 STR	12 SOL/STR	0.47	0.48	0.92
99403-4SF	1/0 STR	14 SOL/STR	1/0 STR	12 SOL/STR	0.52	0.61	0.92
99404-4SF	2/0 STR	14 SOL/STR	2/0 STR	12 SOL/STR	0.53	0.58	0.80
99404HD-4SF	2/0 STR	6 STR	2/0 STR	6 STR	0.53	0.69	1.00
99405-4SF	4/0 STR	6 STR	4/0 STR	6 STR	0.53	0.73	1.15
99406-4SF	250 MCM	6 STR	250 MCM	6 STR	1.00	0.83	1.12
99407-4SF	300 MCM	6 STR	300 MCM	6 STR	1.00	0.83	1.06
99408-4SF	350 MCM	6 STR	350 MCM	6 STR	1.87	0.91	1.24
99409-4SF	500 MCM	2 STR	500 MCM	2 STR	1.38	1.23	1.14
99410-4SF	600 MCM	2 STR	600 MCM	2 STR	1.38	1.23	1.41
99411-4SF	750 MCM	500 MCM	750 MCM	500 MCM	1.93	1.37	1.75

Mechanical Connectors

Lay In Box Connectors

Features


- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance
- Lay-in feature

Applications

- Recognize for multiple applications in panels

Material Finish Electrical Rating

- Aluminum • Tin plated • Voltage : 600 V • Temp : 90°C

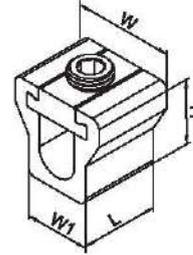

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches			
	CU Max	CU Min	AL Max	AL Min	L	W	W1	H
OEC-LI-1/0	1/0 STR	6 STR	1/0 STR	6 STR	0.80	0.93	0.63	0.89
OEC-LI-2/0	2/0 STR	6 STR	1/0 STR	6 STR	0.80	1.00	0.71	0.95
OEC-LI-3/0	3/0 STR	6 STR	1/0 STR	6 STR	1.00	1.05	0.73	1.07
OEC-LI-250	250 MCM	6 STR	250 MCM	6 STR	1.00	1.23	0.90	1.22
OEC-LI-250-HD	250 MCM	6 STR	250 MCM	6 STR	1.20	1.23	0.90	1.22
OEC-LI-350	350 MCM	6 STR	350 MCM	6 STR	1.00	1.23	0.90	1.22
OEC-LI-350-HD	350 MCM	6 STR	350 MCM	6 STR	1.30	1.38	1.00	1.36
OEC-LI-500	500 MCM	3/0 STR	500 MCM	3/0 STR	1.60	1.65	1.22	1.63
OEC-LI-600	600 MCM	2 STR	350 MCM	6 STR	1.70	1.75	1.32	1.75
OEC-LI-750	750MCM	1/0 STR	750 MCM	1/0 STR	1.80	1.89	1.44	1.88

Mechanical Connectors

Wide Range Tap Connectors-WR Series

Features

- Irreversible feature
- Standard compression tools and dies installed in all sizes/range tacking
- Dual rated for copper and aluminum conductors
- Tin plating for corrosion resistance

Applications


- Recognize for multiple applications in panels

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Aluminum • Tin plated

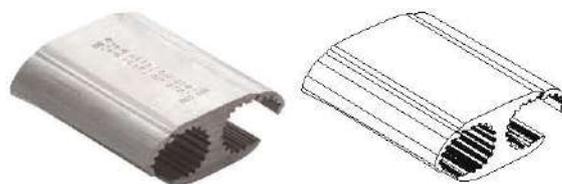

Suitable for mechanical & Hydraulic tools using die index 5/8BG & D, with Maximum applicable crimp



Catalog ID	Conductor Range										Strip LT.
	Standard Conductor						Compact Conductor				
	A-Groove			B-Groove			A-Groove		B-Groove		
	ACSR	STR	SOL	ACSR	STR	SOL	ACSR	STR	ACSR	STR	
OEC-WR9	3-6	2-4	1-4	-	8-14	8-14	-	-	-	-	13/16
OEC-WR139	1/0-4	2/0-3	1-2	-	8-10	6-10	-	-	-	-	1-1/2
OEC-WR149		3-6	2-6	4-6	3-6	2-6	4-6	2-6	3-6	2-6	1-1/2
OEC-WR159	2-6	1-6	2-6	2-6	1-6	2-6	1-6	1-6	1-6	1-6	1-7/16
OEC-WR179	1/0-3	1/0-2	1	4-6	3-6	2-6	1/0-2	2/0-2	4-6	2-6	1-3/4
OEC-WR189	1/0-3	2/0-2	3/0-1	2-6	1-6	1/0-6	2/0-2	2/0-2	1-6	1-6	1-11/16
OEC-WR199	1/0-3	1/0-2	1	2-4	1-4	1-2	1/0-2	2/0-2	1-4	1-2	1-3/4
OEC-WR219	1/0-1	1/0-1	-	1/0-2	1/0-1	-	1/0	2/0-1/0	1/0-1	2/0-1/0	1-7/8
OEC-WR259	1/0-1	2/0-1	-	1/0-1	2/0-1/0	-	2/0-1/0	2/0-1/0	2/0-1/0	2/0-1/0	1-7/8
OEC-WR279	2/0-1/0	3/0-4/0	4/0-2/0	2/0-1	3/0-1/0	3/0-2/0	3/0-1/0	3/0-1/0	3/0-1/0	2/0-1/0	1-13/16
OEC-WR289	2/0-1/0	3/0-2/0	4/0-3/0	2-6	1-6	1/0-6	3/0-2/0	3/0	1-6	1-6	1-13/16
OEC-WR299	2/0-1/0	3/0-2/0	-	4-6	3-6	2-6	3/0-2/0	3/0	4-6	2-6	1-1/2
OEC-WR359	4/0-3/0	4/0-3/0	-	1-4	1/0-3	1	266-3/0	266-7/0	1/0-2	1/0-2	1-7/8
OEC-WR369	4/0-2/0	4/0-3/0	-	1/0-4	1/0-4	1/0-2	266-3/0	266-3/0	1/0-4	1/0-2	1-7/8
OEC-WR379	4/0-3/0	4/0	-	2-6	1-6	1/0-6	266-18/1	266	1-2	1-2	1-13/16
OEC-WR389	4/0-3/0	4/0-3/0	-	2/0-1/0	3/0-2/0	-	266-3/0	266-4/0	3/0-2/0	3/0	2-13/16
OEC-WR399	4/0-3/0	4/0-3/0	-	2/0-1	2/0-1/0	3/0-2/0	266-18/1	266-4/0	2/0-1/0	3/0-1/0	2-3/16
OEC-WR419	4/0-3/0	4/0-3/0	-	4/0-3/0	4/0-3/0	-	266-18/2	266-18/1	266-18/1	266-4/0	2-7/16

Mechanical Connectors

Copper Offset Tongue Lugs-One Hole Mount

Features

- Mechanical connector with special pad feature for low contact resistance
- Rated for copper conductor only
- Tin plating for corrosion resistance

Applications

- Wire termination with rans tacking

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material


- Copper

Finish

- Tin plated

NOTE

- Used Suffix 'T' for Tin Plating Item : 21XXXT

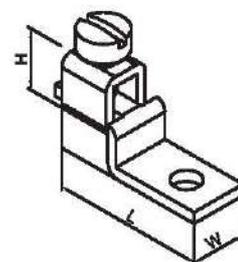

Catalog ID	Conductor Range		Current Rating AMPS	Dimensions In Inches		
	Max	Min		L	W	H
21000	6 STR	16 SOL/STR	25	1.19	0.38	0.50
21001	6 STR	14 SOL/STR	35	1.19	0.38	0.50
21002	4 STR	14 SOL/STR	50/70	1.31	0.50	0.56
21003	2 STR	12 SOL/STR	90	1.55	0.50	0.65
21004	1/0 STR	8 SOL/STR	125	1.97	0.63	0.88
21005	3/0 STR	4 SOL/STR	175	2.19	0.75	1.03
21006	4/0 STR	6 SOL/STR	225	2.38	1.00	1.17
21007	350 MCM	1/0 SOL/STR	300	3.16	1.00	1.39
21008	500 MCM	4/0 SOL/STR	400	4.25	1.50	1.57
21009	1000 MCM	600 MCM	650	4.63	2.00	2.34

Copper Straight Tongue Connector-One Hole Mount

Features

- Mechanical connector with special pad feature for low contact resistance
- Rated for copper conductor only
- Tin plating for corrosion resistance

Applications

- Wire termination with rans tacking

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material


- Copper

Finish

- Tin plated

NOTE

- Used Suffix 'T' For Tin Plating Item : 21XXXT
- * : These Are Non UL

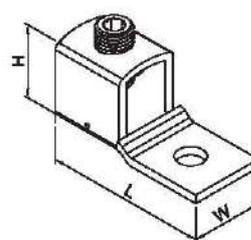

Catalog ID	Conductor Range		Current Rating AMPS	Dimensions In Inches		
	Max	Min		L	W	H
23301	6 STR	14 SOL/STR	25	1.00	0.38	0.72
*23301A	6 STR	14 SOL/STR	25	1.00	0.38	0.72
23302	4 STR	14 SOL/STR	50/70	1.25	0.50	0.54
23303	1/0 STR	14 SOL/STR	125	1.95	0.62	0.82
23303HD	1/0 STR	14 SOL/STR	125	2.18	0.62	0.82
23304	2/0 STR	14 SOL/STR	-	1.95	0.62	0.82
23305	3/0 STR	6 STR	175	-	-	-
23306	4/0 STR	6 STR	225	2.24	1.00	1.06

Mechanical Connectors

Solid Copper Straight Tongue Lugs-One Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Easy to installation

Applications

- Rated for copper conductor only
- Connectors suitable for application upto 35 KV

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material


- Copper

Finish

- Tin plated

NOTE

- Used Suffix 'T' for Tin Plating Item : 21XXXT

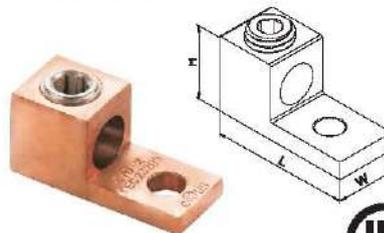

Catalog ID	Conductor Range		Current Rating	Dimensions In Inches		
	Max	Min	AMPS	L	W	H
23201	6 STR	14 SOL/STR	70	1.00	0.37	0.40
23202	4 STR	14 SOL/STR	90	1.00	0.45	0.44
23203	2 STR	14 SOL/STR	125	1.12	0.45	0.48
23204	1/0 STR	14 SOL/STR	175	1.28	0.55	0.66
23205	4/0 STR	2 SOL/STR	225	1.95	0.81	0.95

Copper Straight Tongue Connector-One Hole Mount

Features

- Mechanical connector with special pad feature for low contact resistance
- Rated for copper conductor only
- Tin plating for corrosion resistance

Applications

- Wire termination with rang tacking

Material

- Copper

Finish

- Tin plated


Electrical Rating

- Voltage : 600 V
- Temp : 90°C

NOTE

- Used Suffix 'T' For Tin Plating Item : 21XXXT

*: These Are Non UL

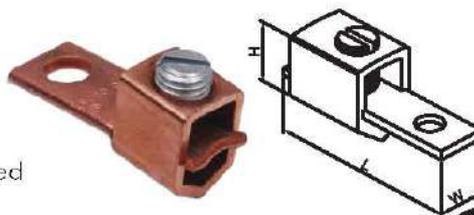

Catalog ID	Conductor Range		Current Rating	Dimensions In Inches		
	Max	Min	AMPS	L	W	H
23307	2 STR	8 STR	90	1.48	0.50	0.64
23308	1/0 STR	6 SOL/STR	125	2.00	0.62	0.82
23309	3/0 STR	6 SOL/STR	175	2.20	0.75	1.03
*23309HD	3/0 STR	6 SOL/STR	175	2.24	0.75	1.03
*23309HD1	3/0 STR	6 SOL/STR	175	2.20	0.75	1.03
23310	4/0 STR	6 SOL/STR	225	2.39	1.00	1.16
23311	250 MCM	6 SOL/STR	-	2.30	1.00	1.16
23312	350 MCM	6 SOL/STR	300	3.30	1.00	1.41
*23312HD	350 MCM	6 SOL/STR	300	3.24	1.00	1.41
23313	350 MCM	1/0 STR	400	3.00	1.50	1.64
*23313HD	350 MCM	1/0 STR	400	3.88	1.50	1.64
23314	500 MCM	1/0 STR	-	4.25	1.50	1.64
*23314HD	500 MCM	1/0 STR	400	4.25	1.50	1.64
23315	600 MCM	1/0 STR	650	4.53	1.77	2.00
23316	750 MCM	1/0 STR	650	4.84	2.00	1.97
*23316HD	750 MCM	1/0 STR	650	5.00	2.00	2.30
23317	1000 MCM	600 MCM	650	-	-	-

Mechanical Connectors


Copper Single Barrel Terminal Lugs-One Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Mounting hole for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

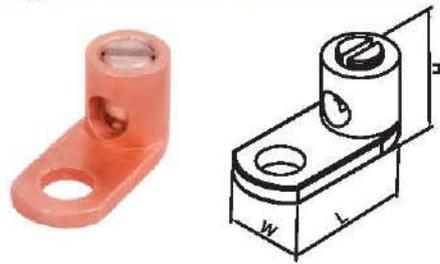

Electrical Rating	Material	Finish
• Voltage : 600 V	• Copper	• Tin plated
• Temp : 90°C		

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22501	8 STR	14 SOL/STR	35	3/16	0.81	0.37	0.37
22502	4 STR	14 SOL/STR	70	1/4	1.13	0.50	0.56


Copper Single Barrel Terminal Lugs-One Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Mounting hole for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

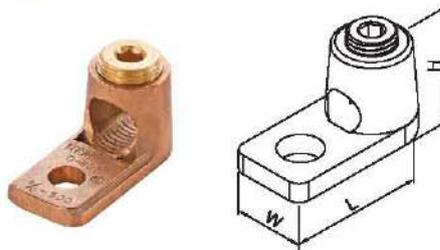

Electrical Rating	Material	Finish
• Voltage : 600 V	• Cast Copper	• Natural
• Temp : 90°C		

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22503	1/0 STR	4 STR	125	5/16	1.50	0.75	0.81
22504	250 MCM	1/0 STR	250	3/8	1.94	0.94	1.00
22505	500 MCM	4/0 STR	400	1/2	3.00	1.38	1.50
22506	1000 MCM	500 MCM	600	1/2	3.94	2.00	1.94


Copper Single Barrel Terminal Lugs-Two Hole Mount

Features

- Single conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

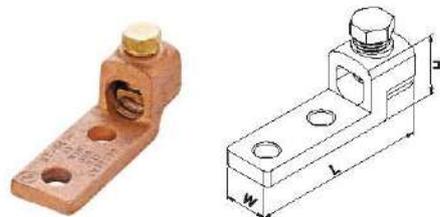

Electrical Rating	Material	Finish
• Voltage : 600 V	• Cast Copper	• Natural
• Temp : 90°C		

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22507	1/0 STR	4 STR	125	5/16	2.69	0.81	0.81
22508	250 MCM	1/0 STR	250	3/8	3.00	1.13	1.00
22509	500 MCM	300 MCM	400	1/2	4.50	1.34	1.44
22510	1000 MCM	500 MCM	600	1/2	4.94	2.00	1.94

Mechanical Connectors

Copper Two Barrel Terminal Lugs-Two Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications


- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Cast Copper • Natural

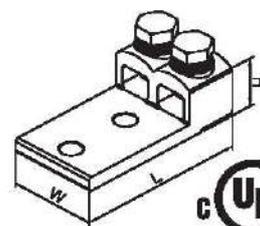

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22511	1/0 STR	4 STR	180	5/16	2.69	1.43	0.88
22512	300 MCM	1/0 STR	500	1/2	4.38	2.00	1.25
22513	500 MCM	300 MCM	800	1/2	4.50	2.50	1.50
22514	1000 MCM	500 MCM	1300	1/2	4.50	2.86	2.00

Copper Two Barrel Terminal Lugs-Four Hole Mount

Features

- Dual conductor design
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications


- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Cast Copper • Natural

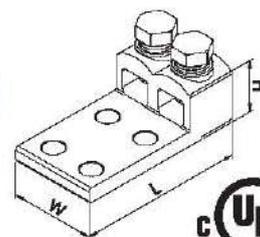

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22515	1/0 STR	4 STR	180	5/16	2.69	1.79	0.86
22516	300 MCM	1/0 STR	500	1/2	4.38	3.00	1.25
22517	500 MCM	300 MCM	800	1/2	4.50	3.62	1.50
22518	1000 MCM	500 MCM	1300	1/2	5.50	3.88	2.00

Copper Three Barrel Terminal Lugs-Two Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications


- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material Finish

- Cast Copper • Natural

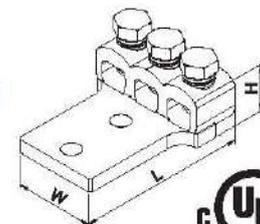

Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22519	1/0 STR	4 STR	270	5/16	2.69	1.79	0.86
22520	250 MCM	1/0 STR	750	3/8	4.38	3.00	1.25
22521	500 MCM	300 MCM	1200	1/2	4.50	3.62	1.50
22522	1000 MCM	500 MCM	1950	1/2	5.50	5.69	2.00

Mechanical Connectors

Copper Three Barrel Terminal Lugs-Four Hole Mount

Features

- Three conductor design
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits


Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material

Finish

- Cast Copper
- Natural



Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22523	1/0 STR	4 STR	270	5/16	2.69	1.80	0.88
22523	300 MCM	1/0 STR	750	1/2	4.38	3.00	1.25
22525	500 MCM	300 MCM	1200	1/2	4.50	3.63	1.50
22526	1000 MCM	500 MCM	1950	1/2	5.56	5.69	2.00

Copper Four Barrel Terminal Lugs-Two Hole Mount

Features

- Four conductor design
- Tin plating for corrosion resistance
- Two mounting holes for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits


Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material

Finish

- Cast Copper
- Natural



Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22527	1/0 STR	4 STR	400	5/16	2.69	2.20	0.88
22528	300 MCM	1/0 STR	1000	1/2	4.38	4.00	1.25
22529	500 MCM	300 MCM	1600	1/2	4.50	4.94	1.50
22530	1000 MCM	500 MCM	2600	1/2	5.56	7.50	2.00

Copper Four Barrel Terminal Lugs-Four Hole Mount

Features

- Four conductor design
- Tin plating for corrosion resistance
- Four mounting holes for position locking

Applications

- Rated for copper conductor only
- Use to wire termination
- Up to 35 kV circuits


Electrical Rating

- Voltage : 600 V
- Temp : 90°C

Material

Finish

- Cast Copper
- Natural



Catalog ID	Conductor Range		Current Rating		Dimensions In Inches		
	Max	Min	AMPS	Bolt Size	L	W	H
22531	1/0 STR	4 STR	400	5/16	2.69	2.20	0.88
22532	300 MCM	1/0 STR	1000	3/8	4.38	4.00	1.25
22532	500 MCM	300 MCM	1600	1/2	4.50	4.94	1.50
22533	1000 MCM	500 MCM	2600	1/2	5.56	7.50	2.00

Mechanical Connectors

Split Bolt Connectors

Features


- Bolts & nut hex design allows easy installation with standard tooling
- Free running threads easy to grip wrench flats

Applications

- Rated for copper conductor only
- Use to wire termination
- Provide maximum pressure and ensure secure

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

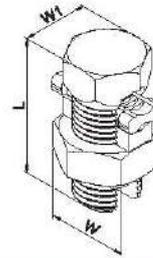

Material

- Copper

Finish

- Natural

Catalog ID	Conductor Range		Min Tap With One Max Main	Dimensions In Inches		
	Max	Min		L	W	H
OEC-90	10 SOL/STR	12 SOL/STR	16 STR	0.78	0.38	0.50
OEC-15	8 SOL/STR	10 SOL/STR	14 STR	0.78	0.38	0.50
OEC-17	6 STR	8 SOL/STR	14 STR	0.97	0.47	0.66
OEC-20	4 STR	8 SOL/STR	14 STR	1.07	0.53	0.72
OEC-22	2 STR	8 SOL/STR	14 STR	1.25	0.60	0.78
OEC-23	2 STR	6 STR	14 STR	1.35	0.69	0.88
OEC-25	1/0 STR	4 STR	14 STR	1.60	0.75	0.94
OEC-26	2/0 STR	2 STR	14 STR	1.81	0.88	1.07
OEC-27	3/0 STR	1 STR	8 STR	2.16	1.00	1.32
OEC-29	250 MCM	1 STR	8 STR	2.16	1.00	1.32
OEC-31	350 MCM	1/0 STR	1/0 STR	2.69	1.32	1.66
OEC-34	500 MCM	2/0 STR	2/0 STR	3.30	1.50	1.88
OEC-39	750 MCM	4/0 STR	4/0 STR	3.65	1.94	2.25
OEC-44	1000 MCM	250 MCM	4/0 STR	-	-	-

Split Bolt Connectors With Spacer

Features


- Bolts & nut hex design allows easy installation with standard tooling
- Free running threads easy to grip wrench flats

Applications

- Rated for copper conductor only
- Use to wire termination
- Provide maximum pressure and ensure secure

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

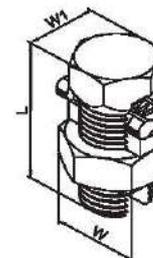

Material

- Copper

Finish

- Tin plated

Catalog ID	Conductor Range For CU		Conductor Range For AL		Dimensions In Inches		
	Max Run	Min Run	Max Tap	Min Tap	L	W	W1
OEC-17D	6 STR	10 SOL/STR	6 STR	10 SOL/STR	0.78	0.50	0.38
OEC-20D	4 STR	10 SOL/STR	4 STR	10 SOL/STR	0.78	0.50	0.38
OEC-23D	2 STR	8 SOL/STR	2 STR	8 SOL/STR	0.97	0.66	0.47
OEC-25D	1/0 STR	6 STR	1/0 STR	6 STR	1.07	0.72	0.53
OEC-26D	2/0 STR	2 STR	2/0 STR	8 SOL/STR	1.25	0.78	0.60
OEC-27D	3/0 STR	1 STR	3/0 STR	8 SOL/STR	1.35	0.88	0.69
OEC-29D	250 MCM	1 STR	250 MCM	8 SOL/STR	1.60	0.94	0.75
OEC-31D	350 MCM	1/0 STR	350 MCM	4 STR	1.81	1.07	0.88
OEC-34D	500 MCM	400 MCM	500 MCM	2 STR	2.16	1.32	1.00
OEC-39D	1000 MCM	250 MCM	1000 MCM	2/0 STR	2.16	1.32	1.00
OEC-44D	1000 MCM	250 MCM	1000 MCM	4/0 STR	2.69	1.66	1.32

Mechanical Connectors

Copper Compression C Tap

Features

- Color coded for proper crimp die selection
- Low installation cost
- Compact size allows for easy taping and insulation of connection


Applications

- Applications include copper tapping, Splicing/pigtailing
- Allows for 2 continuous parallel conductor

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

- | | |
|----------|--------------|
| Material | Finish |
| • Copper | • Tin plated |

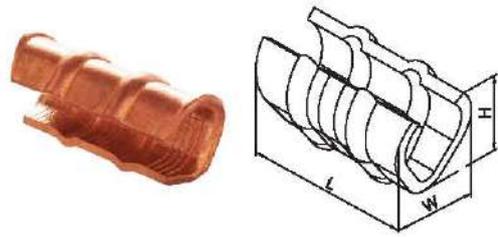

Catalog ID	Conductor Range For Equal Main & Tap		Strip Length	Dimensions In Inches			Color Code
	Max Run	Min Run		L	W	W1	
23101	14 SOL	14-16 SOL/STR	1/2	0.32	0.34	0.29	RED
	12 STR	16-12 STR					
	10 STR	14 STR					
23102	10 STR	10 STR	5/8	0.37	0.38	0.36	BLUE
	8 STR	12 STR					
23103	10 STR	10-12 STR	5/8	0.37	0.46	0.43	GRAY
	8 STR	8-10 STR					
23104	4 STR	8-12 STR	1-1/4	1.17	0.65	0.48	BROWN
	6 STR	6-8 STR					
23105	4 STR	4-6 STR	1-1/4	1.19	0.66	0.55	GREEN
	3 STR	6-12 STR					
23106	4 STR	4 STR	1-1/4	1.17	0.76	0.58	PINK
	3 STR	4-6 STR					
	2 STR	6-12 STR					
23107	1 STR	4-12 STR	2	1.75	0.78	0.64	BLACK
	2 STR	4-6 STR					
	3 STR	4-3 STR					
23108	1/0 STR	4-12 STR	2	1.75	0.90	0.75	ORANGE
	1 STR	4-3 STR					
	2 STR	4-2 STR					
23109	2/0 STR	12-3 STR	2	1.75	0.96	0.80	PURPLE
	1/0 STR	3-2 STR					
	1 STR	1-2 STR					
23110	1/0 STR	1-1/0 STR	2	1.75	1.09	0.85	YELLOW
	2/0 STR	2-1 STR					
	3/0 STR	12-2 STR					

Mechanical Connectors

Copper Compression C Tap-E Style

Features


- Color coded for proper crimp die selection
- Low installation cost
- Compact size allows for easy taping and insulation of connection

Applications

- Applications include copper tapping, Splicing/pigtailing
- Allows for 2 continuous parallel conductor

Material Finish Electrical Rating

- Copper • Tin plated • Voltage : 600 V
- Temp : 90°C

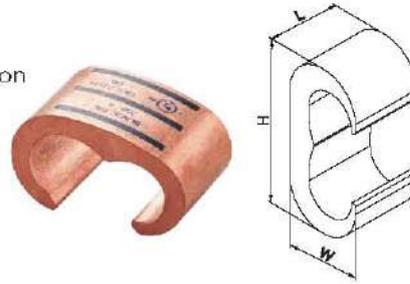

Catalog ID	Conductor Range For Equal Main & Tap		Strip Length	Dimensions In Inches			Color Code
	Max Run	Min Run		L	W	W1	
23111	1 STR	1 STR	1	1.30	0.79	0.79	BLUE
	1/0 STR	1/0-2 STR					
	2/0 STR	2/0-4 STR					
	3/0-4/0 STR	1/0-6 STR					
	4/0 STR	1-8 STR					
23112	2/0 STR	2/0-1 STR	1	1.46	0.78	0.89	BROWN
	3/0 STR	3/0-2 STR					
	4/0 STR	4/0-4 STR					
	250 STR	1/0-8 STR					
23113	2/0 STR	2/0-1 STR	1-1/8	1.67	1.00	0.98	PINK
	3/0 STR	3/0-2 STR					
	4/0 STR	4/0-4 STR					
	250 STR	3/0-6 STR					
23114	2/0 STR	2/0-1 STR	1-1/8	1.71	1.00	1.00	BLACK
	4/0 STR	4/0-2/0 STR					
	250 STR	250-1 STR					
	300 STR	4/0-4 STR					
23115	350 STR	3/0-6 STR	1-5/16	1.85	1.28	1.11	YELLOW
	250 STR	250 STR					
	300 STR	300-3/0 STR					
	350 STR	350-1/0 STR					
	400 STR	300-2 STR					
	450 STR	250-4 STR					
23116	500 STR	250-6 STR	1-5/16	2.20	1.29	1.18	WHITE
	350 STR	350-4/0 STR					
	400 STR	400-2/0 STR					
	450 STR	400-1 STR					
23117	500 STR	500-2 STR	2-3/4	2.75	2.75	1.34	---
	750-500 STR	4/0-6 STR					
	750 STR	750-4/0 STR					

Mechanical Connectors

Copper Compression C Tap-C Style

Features

- Color coded for proper crimp die selection
- Low installation cost
- Compact size allows for easy taping and insulation of connection

Applications


- Applications include copper tapping, Splicing/pigtailing
- Allows for 2 continuous parallel conductor

Material Finish

- Copper
- Tin plated

Electrical Rating

- Voltage : 600 V
- Temp : 90°C

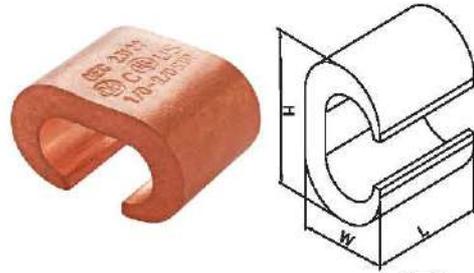

Catalog ID	Conductor Range For Equal Main & Tap		Strip Length	Dimensions In Inches		
	Max Run	Min Run		L	W	W1
23118	4 STR	6 STR	3/4	0.77	0.70	0.46
23119	4 STR	4 STR	3/4	0.80	0.63	0.46
23120	2 STR	4 STR	3/4	0.98	0.75	0.60
23121	2 STR	2 STR	3/4	1.05	0.76	0.60
23122	1/0 STR	1/0 STR	1-1/8	1.35	0.95	0.80
	2/0 STR	2/0 STR				
23123	1/0 STR3	1/0 STR	1-1/4	1.63	1.07	1.00
	4/0 STR	2/0 STR				
23124	3/0 STR	3/0 STR	1-1/4	1.57	1.07	0.97
	4/0 STR	4/0 STR				

Mechanical Connectors

Service Post Connectors-Short Stud One Wire Type


Features

- Lay-in feature makes them excellent for continuous loop grounding and bonding
- Suitable for direct burial in earth or concrete
- Dual rated for copper and aluminum conductors

Applications

- Used for connecting one or two conductors
- Used to ground a bar or a plate

Material	Finish	Electrical Rating
• Copper	• Natural	• Voltage : 600 V • Temp : 90°C

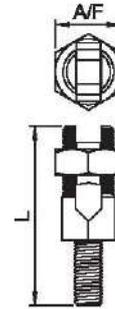

Catalog ID	Nut Width A/F	Total Length	Thread A	Thread B	Wire Range	
					Min	Max
OEC-1S	0.49	1.06	1/4" X 20 UNC	3/8" X24 UNF	10 AWG(SOL/STR)	8 AWG(SOL/STR)
OEC-2S	0.71	1.26	1/4" X 20 UNC	7/16" X 20 UNF	10 AWG(SOL/STR)	6 AWG(STR)
OEC-3S	0.80	1.34	5/16" X 18 UNC	1/2" X 20 UNF	10 AWG(SOL/STR)	4 AWG(STR)
OEC-4S	0.65	1.54	3/8" X 16 UNC	9/16" X 18 UNF	10 AWG(SOL/STR)	2 AWG(STR)
OEC-5S	0.80	1.56	1/2" X 13 UNC	11/16" X 16 UNF	8 AWG(SOL/STR)	1 AWG(STR)
OEC-6S	0.87	1.91	1/2" X13 UNC	3/4" X16 UNF	4 AWG(STR)	1/0 AWG(STR)
OEC-7S	1.01	2.03	1/2" X 13 UNC	7/8" X 14 UNF	2 AWG(STR)	2/0 AWG(STR)
OEC-9S	1.30	0.50	5/8" X 11 UNC	1 1/8" X 12 UNF	1 AWG(STR)	4/0 AWG(STR)

Service Post Connectors-Short Stud Two Wire Type


Features

- Lay-in feature makes them excellent for continuous loop grounding and bonding
- Suitable for direct burial in earth or concrete
- Dual rated for copper and aluminum conductors

Applications

- Used for connecting one or two conductor
- Used to ground to bar or plate

Material	Finish	Electrical Rating
• Copper	• Natural	• Voltage : 600 V • Temp : 90°C

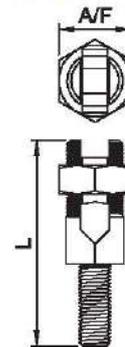

Catalog ID	Nut Width A/F	Total Length	Thread A	Thread B	Wire Range	
					Min	Max
OEC-21S	0.51	1.19	1/4" X 20 UNC	3/8" X24 UNF	12 AWG(SOL/STR)	8 AWG(SOL/STR)
OEC-22S	0.58	1.36	1/4" X 20 UNC	7/16" X 20 UNF	10 AWG(SOL/STR)	6 AWG(STR)
OEC-23S	0.65	1.57	5/16" X 18 UNC	1/2" X 20 UNF	10 AWG(SOL/STR)	4 AWG(STR)
OEC-24S	0.73	1.73	3/8" X 16 UNC	9/16" X 18 UNF	10 AWG(SOL/STR)	2 AWG(STR)
OEC-25S	0.80	1.87	1/2" X 13 UNC	11/16" X 16 UNF	8 AWG(SOL/STR)	1 AWG(STR)
OEC-26S	0.87	2.26	1/2" X13 UNC	3/4" X16 UNF	4 AWG(STR)	1/0 AWG(STR)
OEC-27S	0.88	2.47	1/2" X 13 UNC	7/8" X 14 UNF	2 AWG(STR)	2/0 AWG(STR)
OEC-29S	1.30	3.04	5/8" X 11 UNC	1 1/8" X 12 UNF	1 AWG(STR)	4/0 AWG(STR)

Mechanical Connectors

Service Post Connectors-Long Stud One Wire Type


Features

- Lay-in feature makes them excellent for continuous loop grounding and bonding
- Suitable for direct burial in earth or concrete
- Dual rated for copper and aluminum conductors

Applications

- Used for connecting one or two conductor
- Used to ground to bar or plate

Material	Finish	Electrical Rating
• Copper	• Natural	• Voltage : 600 V • Temp : 90°C

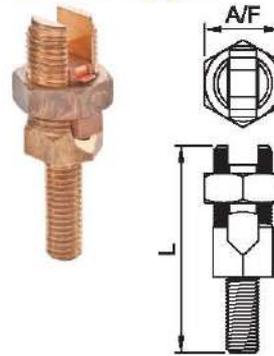

Catalog ID	Nut Width A/F	Total Length	Thread A	Thread B	Wire Range	
					Min	Max
OEC-1L	0.49	1.69	1/4" X 20 UNC	3/8" X 24 UNF	12 AWG(SOL/STR)	8 AWG(SOL/STR)
OEC-2L	0.71	1.89	1/4" X 20 UNC	7/16" X 20 UNF	10 AWG(SOL/STR)	6 AWG(STR)
OEC-3L	0.80	1.95	5/16" X 18 UNC	1/2" X 20 UNF	10 AWG(SOL/STR)	4 AWG(STR)
OEC-4L	0.65	2.19	3/8" X 16 UNC	9/16" X 18 UNF	10 AWG(SOL/STR)	2 AWG(STR)
OEC-5L	0.80	2.20	1/2" X 13 UNC	1 1/16" X 16 UNF	8 AWG(SOL/STR)	1 AWG(STR)
OEC-6L	0.87	2.58	1/2" X 13 UNC	3/4" X 16 UNF	4 AWG(STR)	1/0 AWG(STR)
OEC-7L	1.01	2.69	1/2" X 13 UNC	7/8" X 14 UNF	2 AWG(STR)	2/0 AWG(STR)
OEC-9L	1.30	3.21	5/8" X 11 UNC	1 1/8" X 12 UNF	1 AWG(STR)	4/0 AWG(STR)

Service Post Connectors-Long Stud Two Wire Type


Features

- Lay-in feature makes them excellent for continuous loop grounding and bonding
- Suitable for direct burial in earth or concrete
- Dual rated for copper and aluminum conductors

Applications

- Used for connecting one or two conductor
- Used to ground to bar or plate

Material	Finish	Electrical Rating
• Copper	• Natural	• Voltage : 600 V • Temp : 90°C

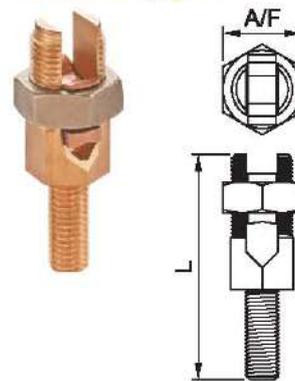

Catalog ID	Nut Width A/F	Total Length	Thread A	Thread B	Wire Range	
					Min	Max
OEC-21L	0.51	1.81	1/4" X 20 UNC	3/8" X 24 UNF	12 AWG(SOL/STR)	8 AWG(SOL/STR)
OEC-22L	0.58	1.97	1/4" X 20 UNC	7/16" X 20 UNF	10 AWG(SOL/STR)	6 AWG(STR)
OEC-23L	0.65	2.17	5/16" X 18 UNC	1/2" X 20 UNF	10 AWG(SOL/STR)	4 AWG(STR)
OEC-24L	0.73	2.36	3/8" X 16 UNC	9/16" X 18 UNF	10 AWG(SOL/STR)	2 AWG(STR)
OEC-25L	0.80	2.52	1/2" X 13 UNC	1 1/16" X 16 UNF	8 AWG(SOL/STR)	1 AWG(STR)
OEC-26L	0.87	2.93	1/2" X 13 UNC	3/4" X 16 UNF	4 AWG(STR)	1/0 AWG(STR)
OEC-27L	0.88	3.15	1/2" X 13 UNC	7/8" X 14 UNF	2 AWG(STR)	2/0 AWG(STR)
OEC-29L	1.30	3.75	5/8" X 11 UNC	1 1/8" X 12 UNF	1 AWG(STR)	4/0 AWG(STR)